



OUTDOOR CATALOG 2024

www.ledlumlighting.com



CATALOG.















P-224



P-224



P-224



P-226



P-226



P-226



P-226



P-228



P-228



P-228



P-228




P-228

High-power LED Outdoor Wall Light Fixtures




LLO-002



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x3W	95x68x32	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	64°	92lm	IP54		

LLO-003




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x1W	95x100x32	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	73°	86lm	IP54		

High-power LED Outdoor Wall Light Fixtures




LLO-001



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x1W	105x65x36	CREE	Aluminium+glass	Dark Grey	3000K/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	53°	220lm/240lm	IP54		

LLO-011




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x1W	74x74x52	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	35°	179lm	IP54		

High-power LED Outdoor Wall Light Fixtures




High-power LED Outdoor Wall Light Fixtures

LLO-005




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x3W	80x50x78	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	81°	121lm	IP54		

LLO-006



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	150x50x78	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5° /85°	162lm	IP54		

LLO-006A



Watt	Dimension(mm)	LED chip	Material	Material	CCT
2x3W	150x50x78	CREE	Aluminum	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	16° /16°	82lm	IP54		

LED Outdoor Wall Light

Control different scenes, flexibly compatible with various spaces
A variety of specifications to meet individual needs




36V
270mA


100-240V
50-60Hz



High-power LED Outdoor Wall Light Fixtures

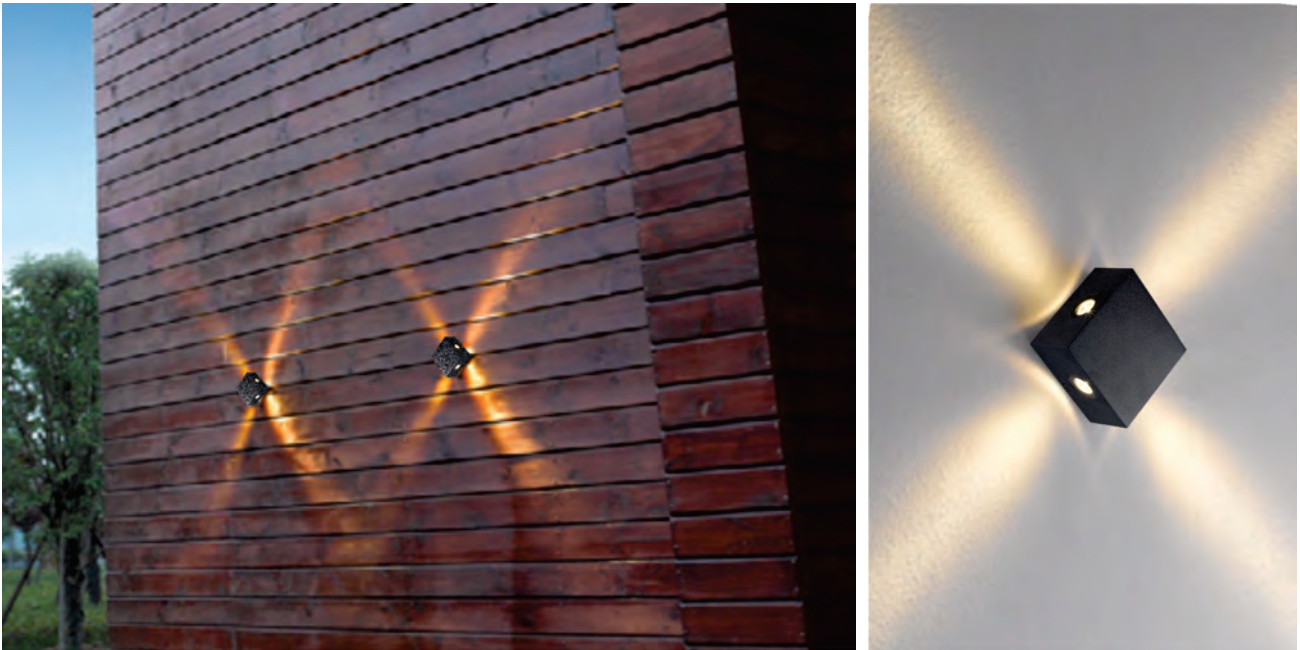


LLO-013




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x1W	100x100x52	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	11°x4	179lm	IP54		

LLO-035




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x1W	∅100x52	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	11°x4	179lm	IP54		

High-power LED Outdoor Wall Light Fixtures

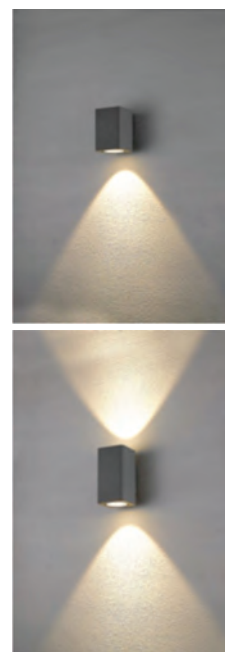


LLO-007



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x12W	138x132x100	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	846lm	IP54		


LLO-007A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x12W	220x132x100	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	1577lm	IP54		


High-power LED Outdoor Wall Light Fixtures

LLO-008




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	116.5x120x121	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	31°	512lm	IP54		

LLO-009



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x6W	121x120x116.5	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	31°	935lm	IP54		

LLO-099D




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x6W	240x106x94	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	73°	725lm	IP54		




High-power LED Outdoor Wall Light Fixtures

LLO-099B



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x12W	133x182x90	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	846lm	IP54		

LLO-099C



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x12W	133x220x90	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	1577lm	IP54		




100-240V
50-60Hz



High-power LED Outdoor Wall Light Fixtures





LLO-099E



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x6W	240x108x120	CREE	Aluminium+ glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	73°	725lm	IP54		

LLO-015



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x4W	90x90x110	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	22°/90°	404lm	IP54		

NARROW/WIDE BEAM


LED Outdoor Wall Light

Control different scenes, flexibly compatible
with various spaces


A variety of specifications to meet individual needs



High-power LED Outdoor Wall Light Fixtures

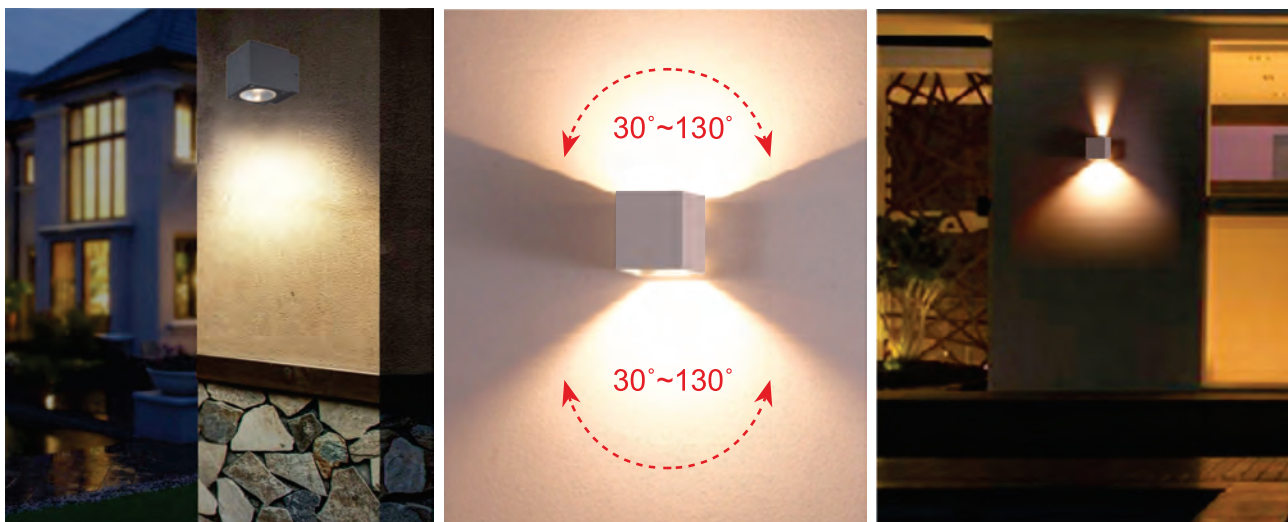


LLO-016




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x7W	130x90x120	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	21°	1208lm	IP54		

LLO-017



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	92x90x120	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	21°	541lm	IP54		

LLO-089




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x5W	119x110x105	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	30° -130°	883lm	IP54		

High-power LED Outdoor Wall Light Fixtures




LLO-084



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x3W	88x65x40	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	101°	85lm	IP54		

LLO-085




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x4W	125x90x43	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	50°	320lm	IP54		

High-power LED Outdoor Wall Light Fixtures




High-power LED Outdoor Wall Light Fixtures

LLO-031




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x7W	135x135x96	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	18°	1153lm	IP54		

LLO-032




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	100x135x96	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	18°	540lm	IP54		

LLO-033



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3x1W	85x106x84	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	24°	211lm	IP54		

LLO-034




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6x1W	110x108x84	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	25°	368lm	IP54		

High-power LED Outdoor Wall Light Fixtures




LLO-086



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x3W	80x75x66	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	84°	85lm	IP54		


LLO-087



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	80x141x66	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	87°	160lm	IP54		


High-power LED Outdoor Wall Light Fixtures

LLO-090




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x7W	145x82x62	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	72°	1116lm	IP54		

LLO-091




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	95x82x62	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	72°	577lm	IP54		

LLO-092




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x4W	108x68x90	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	44°	565lm	IP54		

LLO-093





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x4W	70x68x90	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	38°	273lm	IP54		

High-power LED Outdoor Wall Light Fixtures

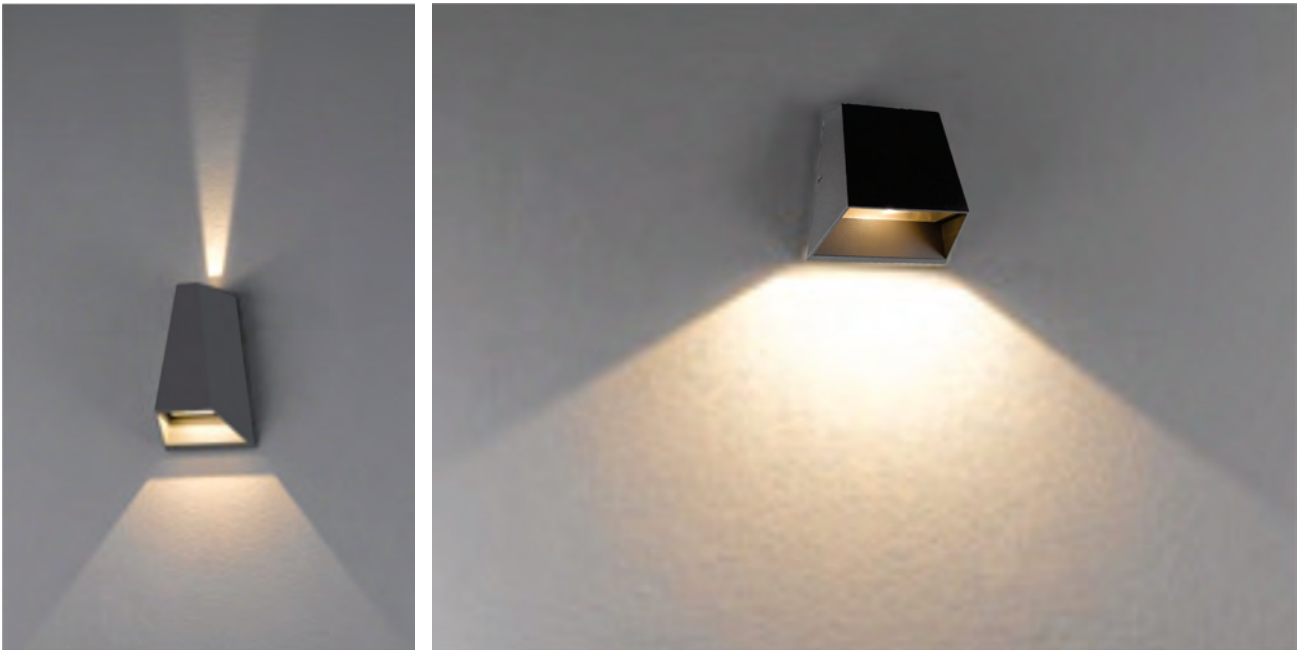


LLO-096

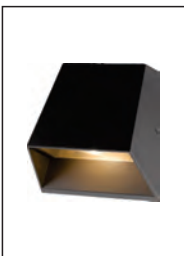

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	125x125x63	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	108°	389lm	IP54		

LLO-098




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	109x173x63	CREE	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15° /78°	160lm	IP54		

High-power LED Outdoor Wall Light Fixtures





LLO-099G

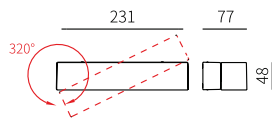

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6x1W	231x77x48	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	28°	724lm	IP54		

LLO-099F



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5x2W	185x156x45	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	26°	724lm	IP54		



100-240V
50-60Hz







LED Outdoor Wall Light


Control different scenes, flexibly compatible
with various spaces

A variety of specifications to meet individual needs

High-power LED Outdoor Wall Light Fixtures

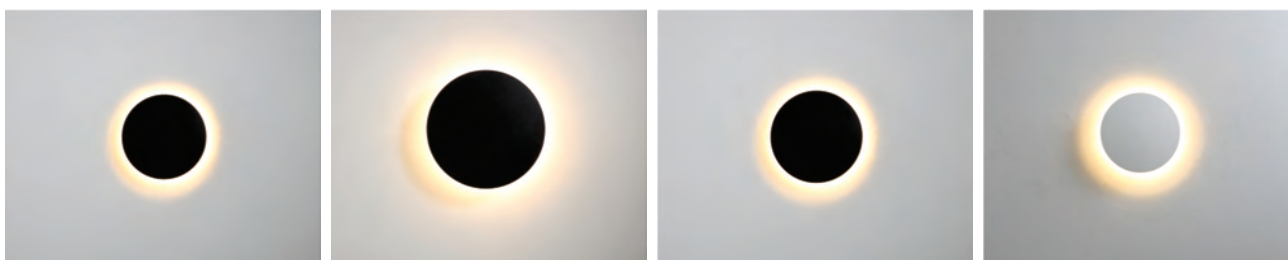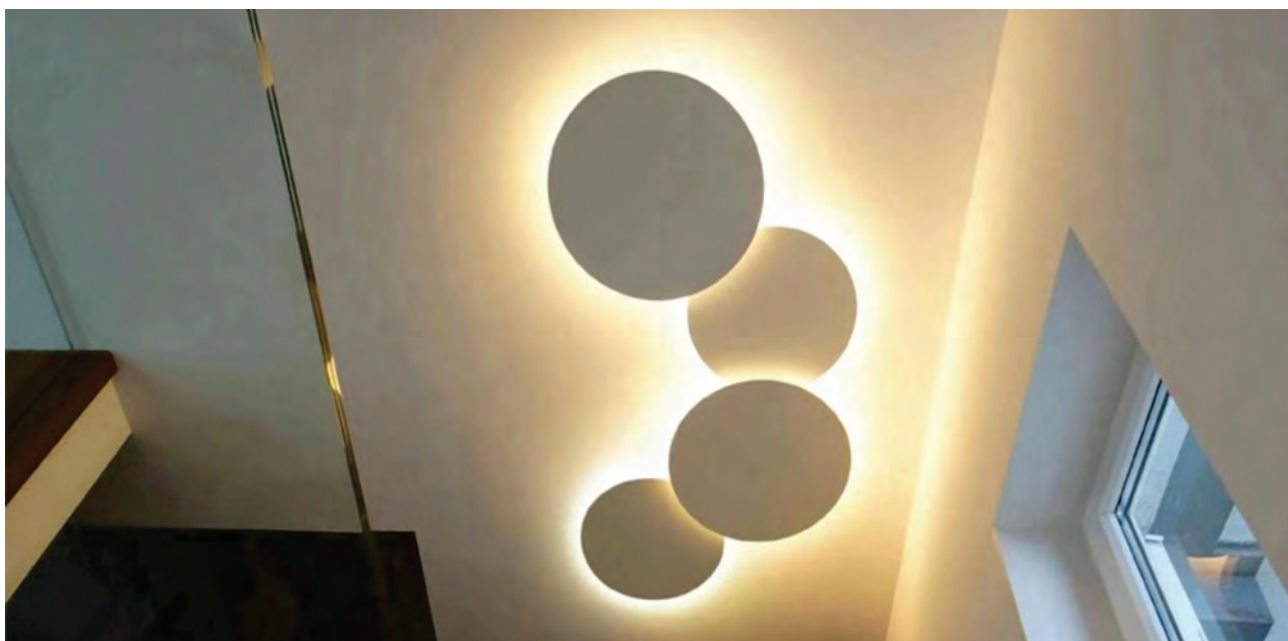


LLO-094A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	135x42	EPISTAR SMD2835	Aluminium	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	360°	560lm	IP54		

LLO-095A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	180x42	EPISTAR SMD2835	Aluminium	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	360°	840lm	IP54		

100-240V
50-60Hz


EPISTAR

High-power LED Outdoor Wall Light Fixtures




High-power LED Outdoor Wall Light Fixtures

LLO-099J




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	Ø90x160	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	25°	140lm/w	IP65		

LLO-099K




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x6W	Ø90x220	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	25°	140lm/w	IP65		

LLO-099L



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	Ø90x160	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	25°	140lm/w	IP65		


LLO-099M



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x12W	Ø90x220	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	25°	140lm/w	IP65		


LED Outdoor Wall Light Light Fixtures

LLO-0990




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	120x61x240	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	610lm	IP65		

LLO-099N




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	120x61x157	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	305lm	IP65		

LLO-099P





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	172x52x141	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	127°	652lm	IP65		

LLO-099R



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
11W	210x46x210	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	202°	322lm	IP65		

LLO-099Q




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	215x128x183	CREE	Aluminium+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	720lm	IP65		

LED Outdoor SMD Wall Light Fixtures



LLO-099T

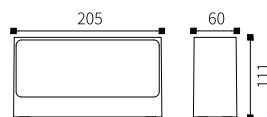

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	205 x111x60	CREE LED	Aluminium/Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	57°	598lm	IP54		


100-240V
50/60Hz



LED Outdoor SMD Wall Light Fixture




LLO-103




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	230x72x56	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Luminous Flux	IP			
≥80	275lm	IP65			

LLO-027



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	200x69x103	OSRAM	Die-cast Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	350°	364lm	IP54		

LLO-028




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	219x55x169	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Luminous Flux	IP			
≥80	621lm	IP54			

LED Outdoor SMD Wall Light Fixtures




LLO-102

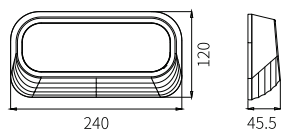


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	240x120x45.5	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Luminous Flux	IP			
≥80	450lm	IP65			

LLO-099H




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
11W	200x55	EVERLIGHT AC LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	114°	872lm	IP54		

LED Outdoor SMD Wall Light Fixtures


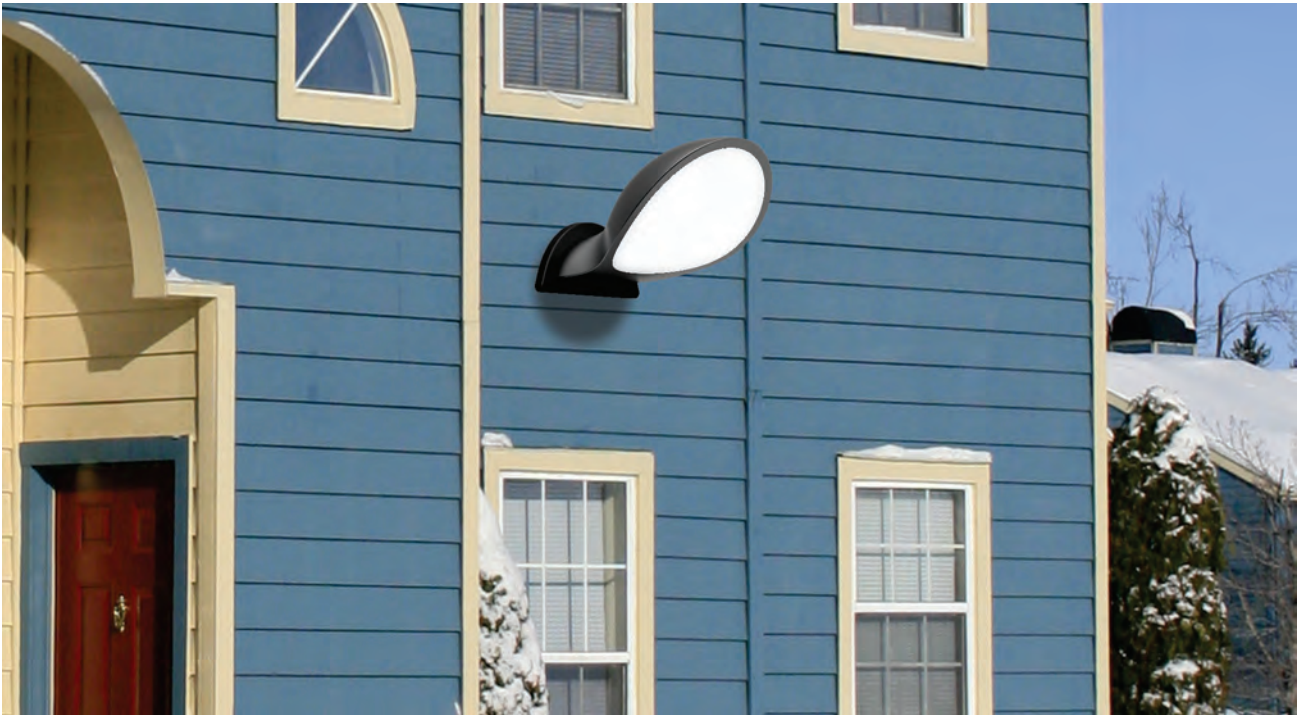


LLO-079

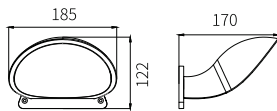

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	185x122x170	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	465lm	IP54		

LLO-078




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	210x60x43	OSRAM	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	114°	310lm	IP54		

LED Outdoor SMD Wall Light Fixtures




LLO-074

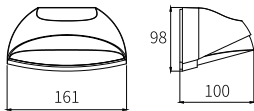

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	161x100x98	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	388lm	IP54		

LLO-073

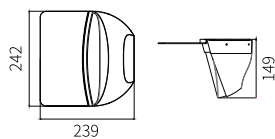


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	242x239x149	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	754lm	IP54		


100-240V
50-60Hz

EPISTAR

LED Outdoor Wall Fixtures

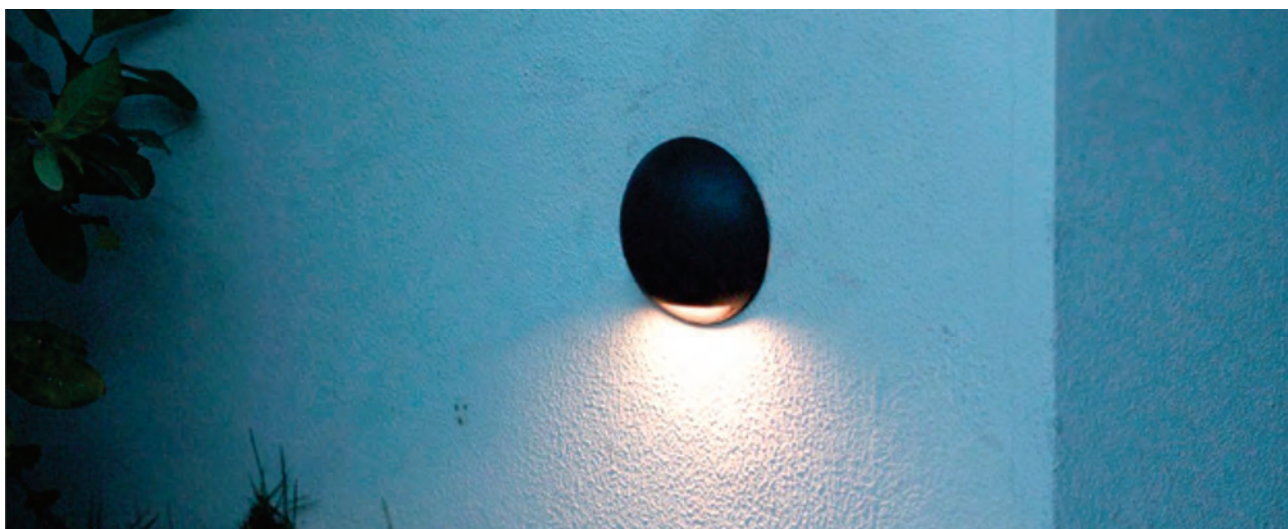


LLO-079N





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	180x88x130	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	600lm	IP54		

LLO-079E




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	120x37	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	72°	117lm	IP65		

LLO-079F




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	120x37	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	72°	176lm	IP65		

LED Outdoor SMD Wall Light Fixtures

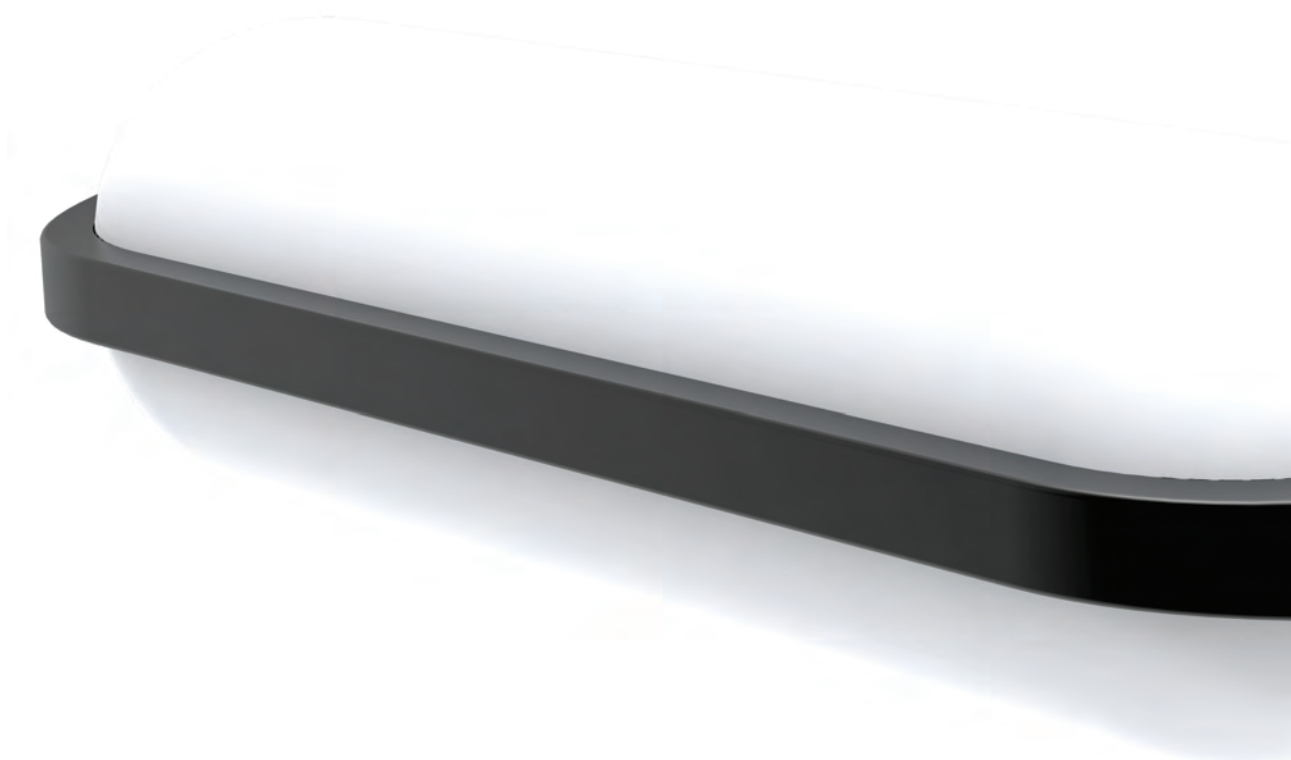


LLO-079A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	222x118x65.5	EPISTAR	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	127°	1081lm	IP54		


LLO-079B

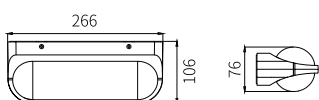

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	266x106x76	OSRAM	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	121°	1202lm	IP54		


LED Outdoor Wall Light Light Fixtures

LLO-079G




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	112x112x35	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	77°	216lm	IP65		

LLO-079H




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	201x69x286	SMD-EVERLIGHT	Aluminium+ glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	113°	662lm	IP54		

LLO-079I



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
16W	183x130x183	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	960lm	IP65		


LLO-079J



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
16W	230x55x230	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	960lm	IP65		


LED Outdoor Wall Light Light Fixtures

LLO-079K




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	150x105x150	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP54		

LLO-079L



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	200x105x200	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	1080lm	IP54		

LLO-079M




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	150x105x280	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	1080lm	IP54		

LED Outdoor Wall Light


Control different scenes, flexibly compatible with various spaces
A variety of specifications to meet individual needs

EPISTAR

LED Outdoor Wall Light Light Fixtures


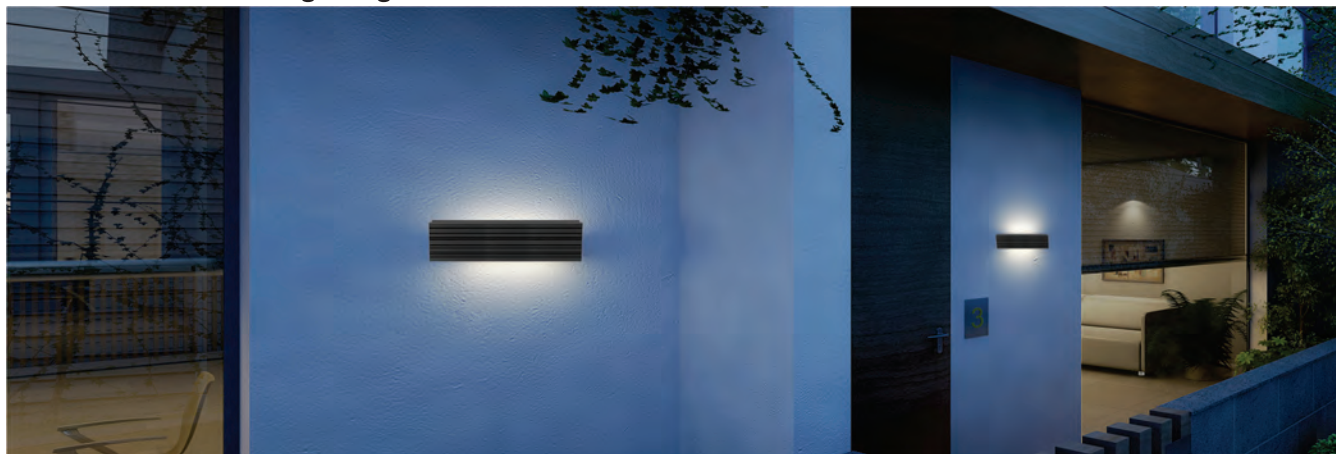


LLO-079X



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	95x37x600	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	78°	556lm	IP65		

LLO-079Y

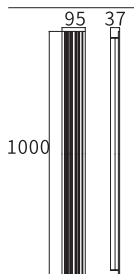


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	95x37x1000	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	78°	847lm	IP65		

LED Outdoor Wall Light Light Fixtures




LLO-079Z

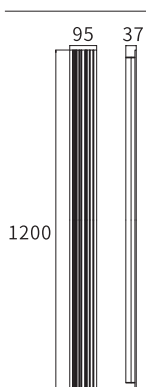


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
26W	95x37x1200	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	78°	1079lm	IP65		

LLO-0790

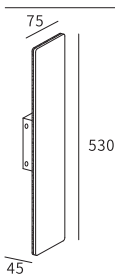


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	75x45x530	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	/	IP54		

LED Outdoor Wall Light Light Fixtures

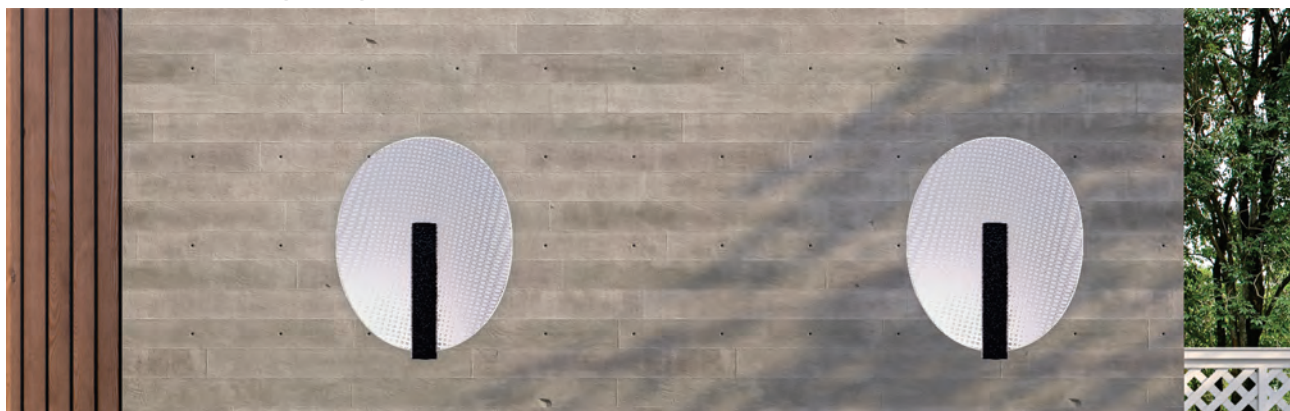


LLO-079V



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	230X324x106	SMD LED	Aluminium /PMMA	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	268°	296lm	IP54		

LLO-079T

CASTING WITH GLASS

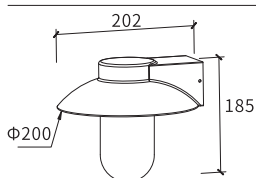


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	202x200xH185	/	Aluminium	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	180°	612.5lm	IP65		



220-240V
50/60Hz


LED Outdoor SMD Wall Light Fixtures

LLO-094





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	258x72x41	Philips-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	74°	360lm	IP65		

LLO-095



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	180x45x30	Philips-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	233lm	IP65		


LLO-100



10xLED

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	90x38x60	EVERLIGHT	Aluminium+pc	Dark Grey	3000K/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	98°	130lm/140lm	IP54		

LLO-101

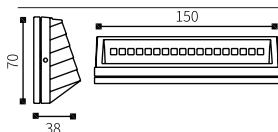

18xLED

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3.6W	150x38x70	EVERLIGHT	Aluminium+pc	Dark Grey	3000K/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	98°	234lm/252lm	IP54		


200-240V
50Hz

PHILIPS EVERLIGHT

LED Outdoor SMD Wall Light Fixtures





LLO-104




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	82x82x58	Philips-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	93°	218lm	IP54		

LLO-105

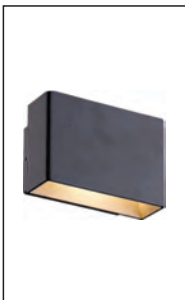


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	122x82x59	Philips-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	118°	261lm	IP54		

LED Outdoor Step Light Fixtures-surface

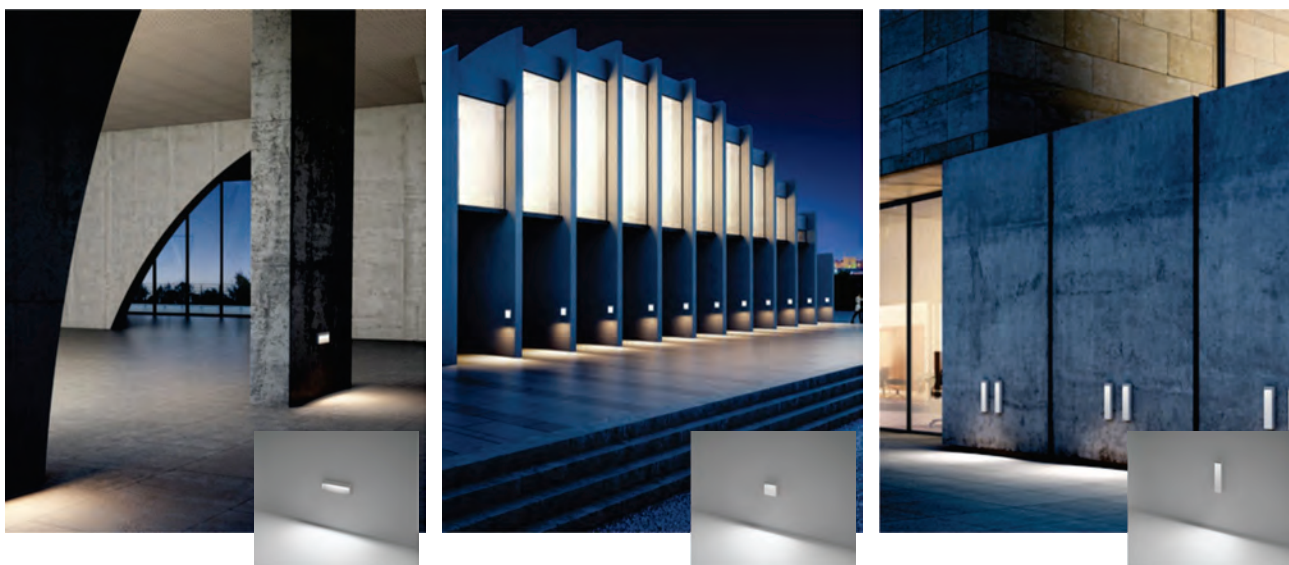


LLO-152




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4W	95x95x31	PHILIPS-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	33°	185lm	IP65		

LLO-153



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	250x95x31	PHILIPS-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	47°	487lm	IP65		

LLO-154




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	250x65x31	PHILIPS-AC LED	Die-cast aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	53°	250lm	IP65		

220-240V
50-60Hz

PHILIPS


LED Outdoor Step Light Fixtures-surface

LLO-159K




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	110x22	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP54		

LLO-159L




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	160x30	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	360lm	IP54		

LLO-159M



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	105x22x105	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP54		



LLO-159N



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	160x30x160	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	360lm	IP54		



LED Outdoor Wall Light

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

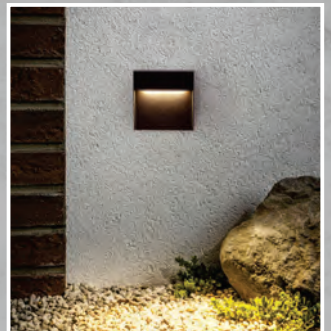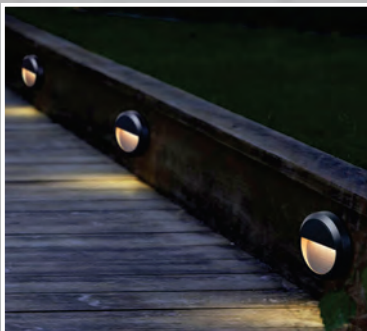


LED Outdoor Step Light Fixtures-surface

LLO-159H




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	128x30	EPISTAR	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	120lm	IP65		

LLO-159I



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	210x30x85	EPISTAR	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP65		

LLO-159J




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	210x30x85	EPISTAR	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	300lm	IP65		




LED Outdoor Step Light Fixtures-surface

LLO-1590




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	155x37x75	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP65		

LLO-159P



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	240x37x75	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	300lm	IP65		

LLO-159Q

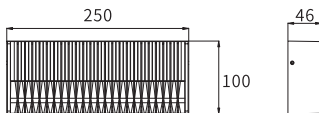


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	250x100x46	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	69°	192lm	IP65		




LED Outdoor Surface Light Fixtures

LLO-059H




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	190x75	EPISTAR SMD	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	580lm	IP65		

LLO-059I



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
13W	245x75	EPISTAR SMD	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	970lm	IP65		


LLO-059J



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	310x75	EPISTAR SMD	ABS+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	1300lm	IP65		



LED Outdoor Surface Light Fixtures

LLO-059K




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	300x300x47	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	123°	1464lm	IP65		

LLO-052

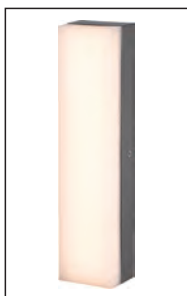

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	300x70x53	EVERLIGHT	Die-cast Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	127°	350lm	IP65		

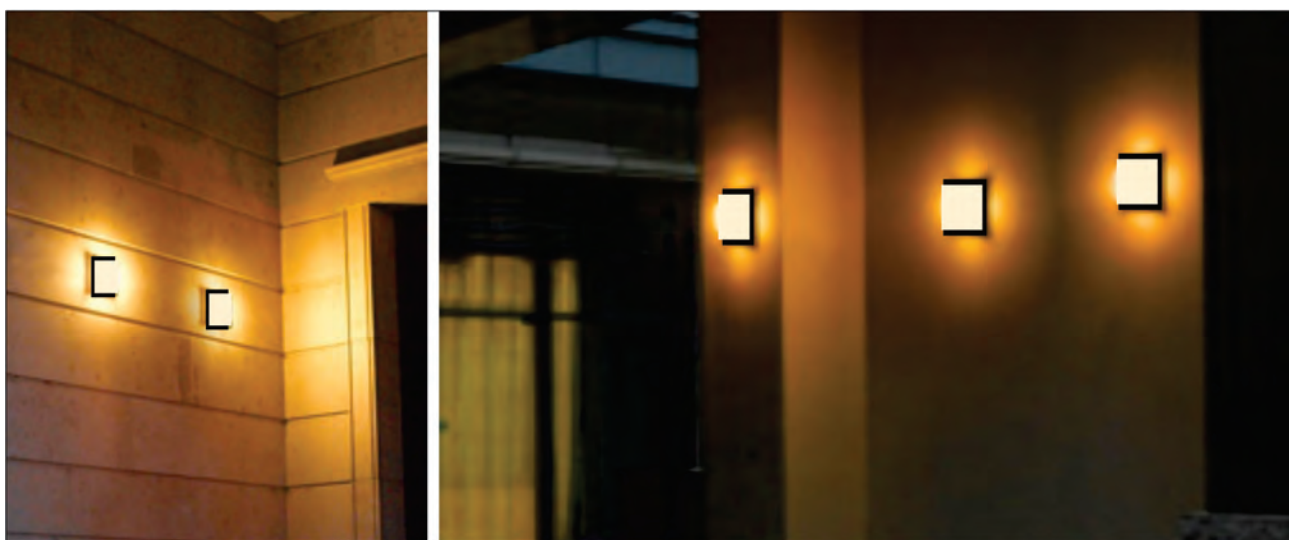

220-240V
50-60Hz


100-130V
50-60Hz

EVERLIGHT

LED Outdoor Surface Light Fixtures




LLO-043



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	140x145	CREE	Aluminium+ glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	46°	1429lm	IP54		

LLO-045




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	95x90	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	17°	581lm	IP54		

LED Outdoor Surface Light Fixtures




LLO-047



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	205x130	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	55°	854lm	IP65		

LLO-053



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x12W	90x137	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	44°	846lm	IP54		

100-240V
50-60Hz


220-240V
50-60Hz



LED Outdoor Surface Light Fixtures




LLO-042



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	140x100	CREE	Aluminium+ glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	46°	846lm	IP54		

LLO-046



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	90x94	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	23°	502lm	IP54		




100-240V
50-60Hz

220-240V
50-60Hz

LED Outdoor Surface Light Fixtures




LLO-059




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	52x10	DOB	Aluminium	Black/ White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	450-500lm	IP54		

LLO-059A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	100x10	DOB	Aluminium	Black/ White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	900-1000lm	IP54		

LLO-059C




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	50x50x10	DOB	Aluminium	Black/ White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	450-500lm	IP54		

100-240V
50-60Hz

LED Outdoor Surface Light Fixtures




LLO-048



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	90x90x102	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	43°	707lm	IP54		


LLO-054



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x7W	260x260x74	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	28°	1859lm	IP54		


Hi-power LED Surface Wall Light Fixtures

LLO-059D




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	65x45	Lumens/ DOB	Aluminium	Dark Grey/White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>90	35°	430lm	IP54		

LLO-059E




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	80x45	Lumens/ DOB	Aluminium	Dark Grey/White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>90	35°	865lm	IP54		

LLO-059F



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	95x55	Lumens	Aluminium	Dark Grey/White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>90	30°	1198lm	IP54		

LLO-059G



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
30W	120x62	Lumens	Aluminium	Dark Grey/White	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>90	50°	2281lm	IP54		

120-240V
50-60Hz


DOB
no driver



LED Outdoor White Body/Grey Body Wall Light Fixtures




LLO-130



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	180x118	OSRAM	Aluminium	White	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	17°	630lm	IP65		

LLO-131




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3x2W	Ø107x85	Ø75	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	5°	/	540-600lm	IP54	

LED Outdoor White Body/Grey Body Wall Light Fixtures




LLO-139C




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	55x45x60	CREE	Aluminium	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	180-200lm	IP65		

LLO-139D



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4W	85x85x57	CREE XTE	Die-casting Aluminium+Pc	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	30°	240lm	IP65		


LLO-139E



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1W	55x45x60	CREE	Aluminium	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	70-80lm	IP54		


LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-139F




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	115x105x60	Bridgelux	Aluminium+pc	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	540-600lm	IP54		

LLO-139G




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x1W	40x50x40	Bridgelux	Aluminium	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	180-200lm	IP54		

LLO-139H




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1W	40x50x40	Bridgelux	Aluminum	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	90-100lm	IP54		

LLO-139I



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x2W	70x80x70	Bridgelux	Aluminum	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	180-200lm	IP54		

LLO-139J




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x2W	70x80x70	Bridgelux	Aluminum	Dark Grey/White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	360-400lm	IP54		

LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body




LLO-139S



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	70x65x28	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54



LLO-139T



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	35x50	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54


LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-139U



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	40x40x50	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54

LLO-139V





Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	43x59	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54




LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-139K




Watt	Dimension(mm)	LED chip	Material	Body color
4x3W	190x91x65	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	≥80	60°	1080-1200lm	IP54

LLO-139M



Watt	Dimension(mm)	LED chip	Material	Body color
2x3W	98x92x70	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	≥80	60°	540-600lm	IP54

LLO-139N





Watt	Dimension(mm)	LED chip	Material	Body color
2x5W	127x137x90	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	≥80	60°	900-1000lm	IP54





LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-1390




Watt	Dimension(mm)	LED chip	Material	Body color
2x3+2W	150x80x55	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	720-800lm	IP54

LLO-139P




Watt	Dimension(mm)	LED chip	Material	Body color
2x5+2W	200x110x60	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	1080-1200lm	IP54

LLO-139Q



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W+1W	97x50x54	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	270-300lm	IP54


LLO-139R



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W+1W	97x54x30	Bridgelux	Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	270-300lm	IP54


LED Outdoor Surface Wall Light Fixtures-White Body/Grey Body

LLO-139W




Watt	Dimension(mm)	LED chip	Material	Body color
4x1W	45x45xh50	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	360-400lm	IP54

LLO-139X




Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	35x35xh50	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54

LLO-139Y



Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	25x25xh70	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54

LLO-139Z





Watt	Dimension(mm)	LED chip	Material	Body color
2x1W	35x35xh83	Bridgelux	Aluminium	Dark Grey/White
CCT	CRI	Beam Angle	Luminous Flux	IP
3000K	>80	60°	180-200lm	IP54

LED OUTDOOR PATTERN LIGHT SERIES

LLO-132


DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	35x35x50	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	180-200lm	IP54		

LLO-133


DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	42x40	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	180-200lm	IP54		

LLO-134


DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1W	42x40	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	90-100lm	IP54		

LLO-135


DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	55x45x60	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	180-200lm	IP54		

LLO-136

DOT OVER LENSE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
4W	70x50x70	/	Aluminium	Dark Grey/Sandy White	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60-5°	360-400lm	IP54		

LED OUTDOOR PATTERN LIGHT SERIES

LLO-137A



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
4x1W	130x100x35	/	Aluminium	Black+Gold	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	360-400lm	IP54		

LLO-137B



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
6x1W	180x100x35	/	Aluminium	Black+Gold	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	540-600lm	IP54		


LLO-137C



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
8x1W	235x100x35	/	Aluminium	Black+Gold	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	720-800lm	IP54		


LED OUTDOOR PATTERN LIGHT SERIES

LLO-139ZA
DOT OVER LENSE

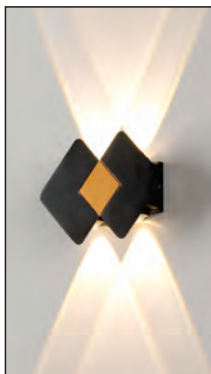

Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
4x1W	145x100x35	/	Aluminium	Black+Gold	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	360-400lm	IP54		

LLO-139ZB
DOT OVER LENSE

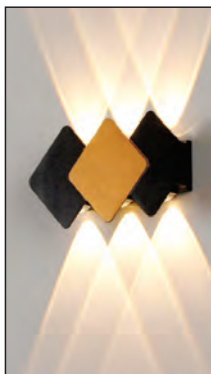

Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
6x1W	190x100x35	/	Aluminium	Black+Gold	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	540-600lm	IP54		


LLO-139ZC
DOT OVER LENSE



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
8x1W	240x100x35	/	Aluminium	Black+Gold	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	720-800lm	IP54		

LED Underground Light Fixtures(with IP68 Connector)

LLO-129E




WITH HONEY COMB




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
3W	62x85	60x85	CREE	304 stainless steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	15°	140LM/W	IP67	Stainless Steel	

LLO-129




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
1W	117x67	63x114	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	28°	89lm	IP65	

LLO-129C



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
1W	31x46	29.5x55	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	45°	80lm	IP65	

LLO-129D



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	42x80	40	Bridgelux	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	130lm	IP65	

110-240V
50-60Hz

100-240V
50-60Hz

bridgelux

CREE

OSRAM

EPISTAR


LED Under ground Light

Control different scenes, flexibly compatible
with various spaces


A variety of specifications to meet individual needs



LED Underground Light Fixtures(with IP68 Connector)

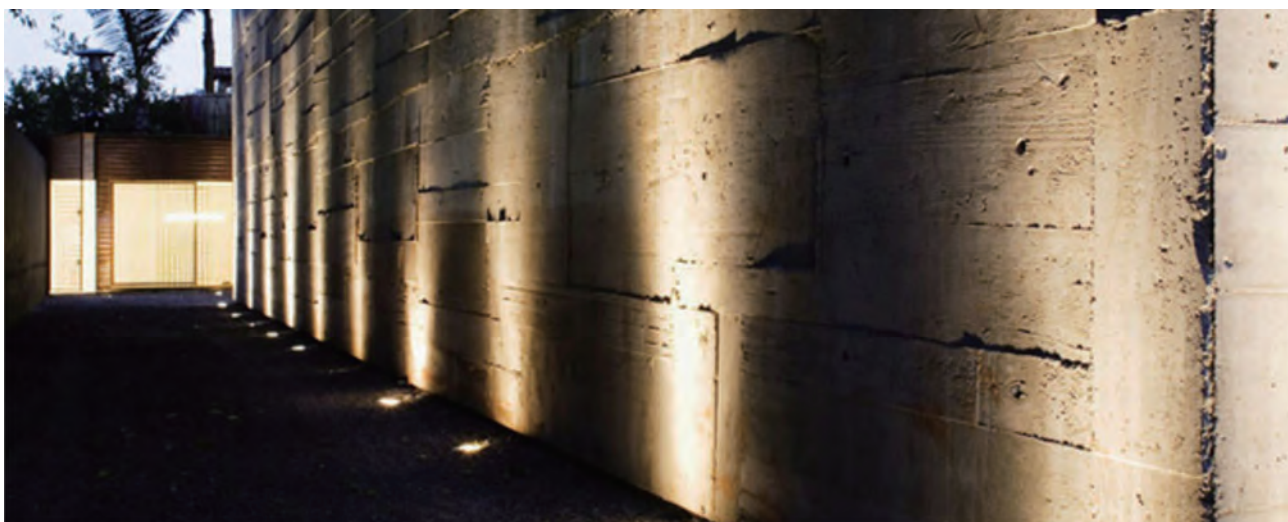


LLO-122




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	105x120	97	CREE	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	96°	180lm	IP65	

LLO-127




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	105x125x103	117x102	CREE	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	27°	597lm	IP65	

LLO-128





Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	118x100	90	CREE	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	26°	208lm	IP65	

LED Underground Light Fixtures(with IP68 Connector)

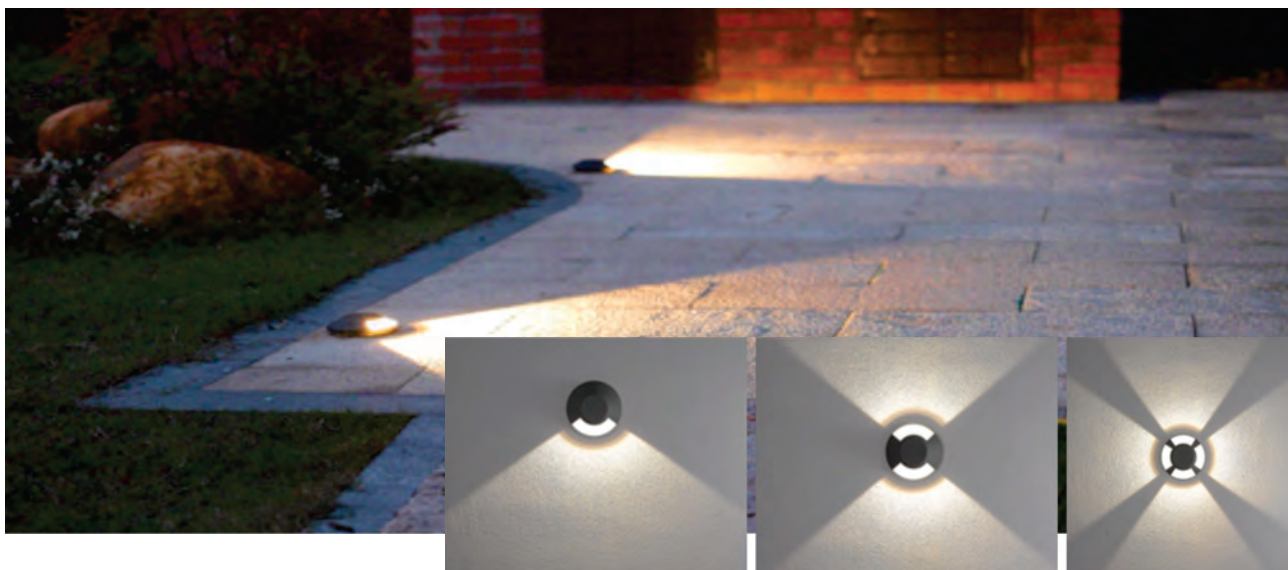


LLO-124




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	140x125	117x118	CREE	Die-cast Aluminium+pc	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	110°	67lm	IP65	

LLO-125




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	140x125	117x118	CREE	Die-cast Aluminium+pc	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	99°	135lm	IP65	

LLO-126



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	140x125	117x118	CREE	Die-cast Aluminium+pc	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	70°	188lm	IP65	

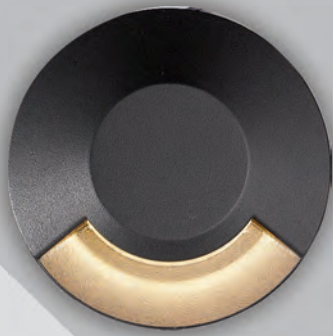

LED Under ground Light

Control different scenes, flexibly compatible
with various spaces

A variety of specifications to meet individual needs




LED Underground Light Fixtures(with IP68 Connector)




LED Underground Light Fixtures(with IP68 Connector)

LLO-129I




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
6W	85x110	75	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	360lm	IP65	

LLO-129J




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
6W	85x100	75	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	720lm	IP65	

LLO-129K



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
12W	120x125	100	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	360lm	IP65	

LLO-129L




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
12W	120x125	100	EPISTAR	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	720lm	IP65	

LED Underground Light Fixtures(with IP68 Connector)




LLO-129F




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3x3W	110x100	100	CREE	Die-cast Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	270lm	IP65	

LLO-129G



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
6x2W	160x110	150	CREE	Die-cast Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	360lm	IP65	


LLO-129H



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
9x2W	160x110	150	CREE	Die-cast Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
2700K	≥80	15°	480lm	IP65	



LED Outdoor Under Ground/surface Fixtures

LLO-129M




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1.5W	210x210x55	CREE	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	90lm	IP67		

LLO-129N




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	210x210x55	CREE	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	180lm	IP67		

LLO-129O




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	210x210x55	CREE	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	360lm	IP67		


LLO-129R



Watt	Dimension(mm)	Cut-Out(mm)	LED Chip	Material	Body color	CCT
32W	Ø190x130	Ø180	CREE	Aluminium	Black	2700K
CRI	Beam Angle	Luminous Flux	IP			
≥80	15°	2500lm	IP67			

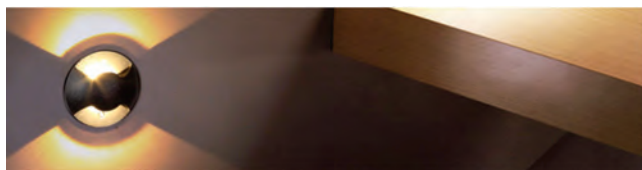


LED Outdoor Concealed Step Light Fixtures

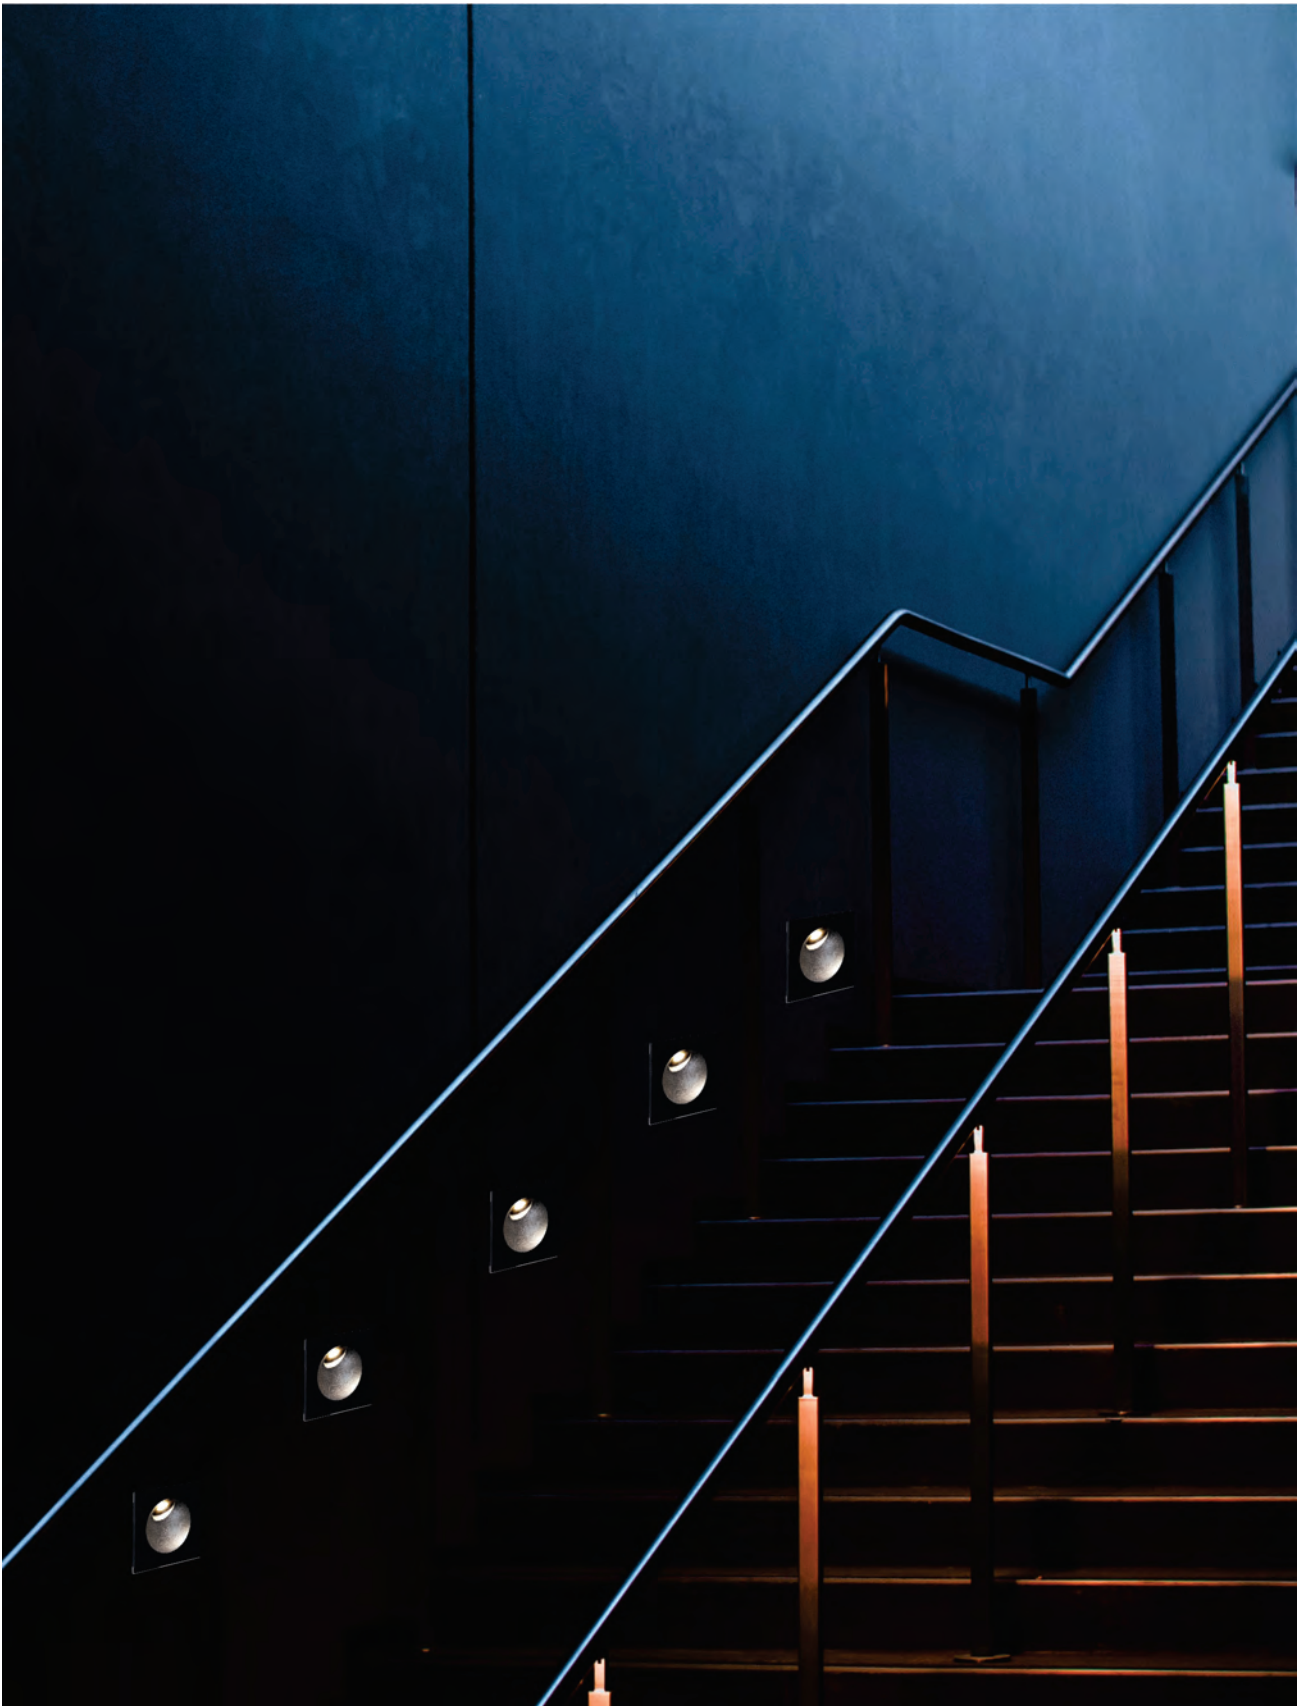


LED Outdoor Concealed Step Light Fixtures

LLO-140




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	80x60	78	CREE	Aluminium	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	50°	146lm	IP54	

LLO-159Y



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	80x42	EPISTAR SMD	Aluminum+ Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	140lm	IP65		

LLO-159Z




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	80x42x80	EPISTAR SMD	Aluminum+ Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	140lm	IP65		

LED Outdoor Concealed Step Light



Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs



LED Outdoor Concealed Step Light Fixtures


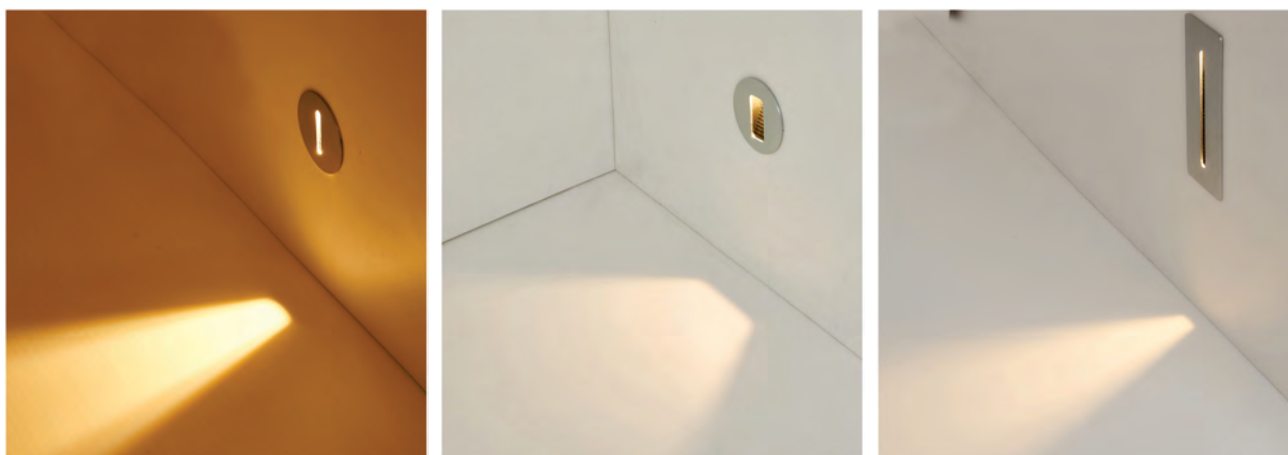


LLO-159A




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
5W	92x73	80x70	EPISTAR COB	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	45°	610lm	IP65	

LLO-159B



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
5W	92x73	80x70	EPISTAR COB	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	20°	610lm	IP65	


LLO-159C



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
5W	170x70x58	56x155x55	EPISTAR COB	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	20°	610lm	IP65	


LED Outdoor Concealed Step Light Fixtures

LLO-159D




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	35x70	30	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	60°	300-310lm	IP65	

LLO-159E




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	35x35x70	30x30	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	60°	300-310lm	IP65	

LLO-159F



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	35x70	30	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	10°	300-310lm	IP65	

LLO-159G



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	35x70	30	CREE	Aluminium+pc	Stainless Steel
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	30°	300-310lm	IP65	

LED Outdoor Concealed Step Light


Control different scenes, flexibly compatible
with various spaces

A variety of specifications to meet individual needs




LED Outdoor Concealed Step Light Fixtures

LLO-142





Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
2x1W	114x114x65	107x107x62	CREE	Die-cast Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	29°	169lm	IP65	

LLO-143




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
4x1W	114x170x65	107x163x62	CREE	Die-cast Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	31°	327lm	IP65	

LLO-144



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
6x1W	114x226x65	107x219x62	CREE	Die-cast Aluminium	Dark Grey
CCT	CRI	Beam Angle	Luminous Flux	IP	
3000K	≥80	29°	529lm	IP65	

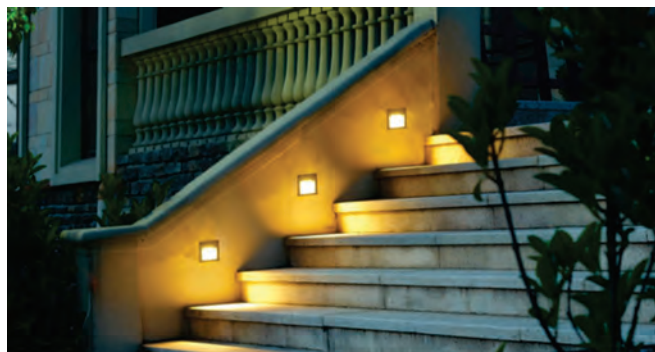


LED Outdoor Step Light Fixtures-concealed



LED Outdoor Step Light


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

LLO-159S



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
2W	43x43	36x36	CREE	Aluminium+pc	Black/White
CCT	CRI	Luminous Flux	IP		
3000K	>80	160lm	IP54		


LLO-159R



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
2W	Ø43	36	CREE	Aluminium+pc	Black/White
CCT	CRI	Luminous Flux	IP		
3000K	>80	160lm	IP54		


LED Outdoor Concealed Step Light Fixtures

LLO-159T




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	90x71x90	EPISTAR SMD	Aluminum+ Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	90lm	IP65		

LLO-159U




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	140x71x70	EPISTAR SMD	Aluminum+ Glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	90lm	IP65		

LLO-159V

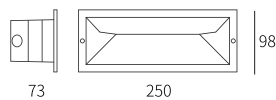

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	250x73x98	EPISTAR SMD	Aluminum + PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	900lm	IP65		

LLO-159W


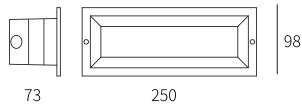


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	250x73x98	EPISTAR SMD	Aluminum + PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	120°	900lm	IP65		

LED OUTDOOR FOOT LIGHTS

LFO-001


MAGNETIC PLATE

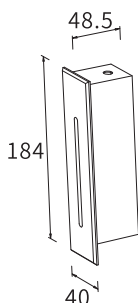

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	184x40x48.5	160x33x45	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-002


MAGNETIC PLATE



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	90.2x90.2x38	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-003

MAGNETIC PLATE


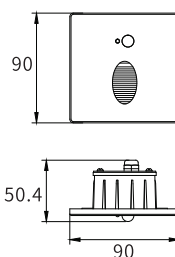


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	52x70x50	Aluminium	Dark Grey/White/Golden	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LED OUTDOOR FOOT LIGHTS

LFO-004


MAGNETIC PLATE

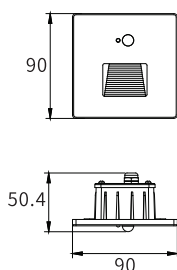

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	52x70x50	Aluminium	Dark Grey/White/Golden	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-005


MAGNETIC PLATE

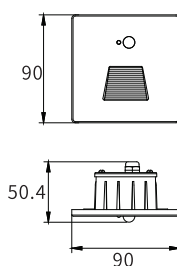

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	52x70x50	Aluminium	Dark Grey/White/Golden	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-006


MAGNETIC PLATE

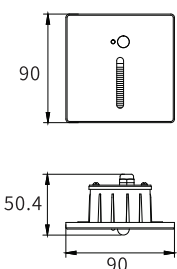

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	90x90x50.4	52x70x50	Aluminium	Dark Grey/White/Golden	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	


LED OUTDOOR FOOT LIGHTS

LFO-007




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	102x58x53.5	96.5x50x50	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP66	

LFO-008




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	146x71x53.5	134x66x51	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	OSRAM	262.5lm	IP65	

LFO-009

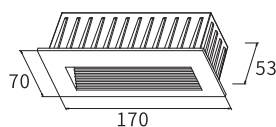

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	170x53x70	161x60x50	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	EPISTAR	437.5lm	IP66	

LFO-010

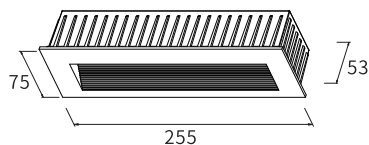


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	255x53x75	247x69x50	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	80°	EPISTAR	700lm	IP66	

LED Garden Light Fixture With Spike/base(IP68 Connectors)




LED Garden Light Fixture With Spike/base(IP68 Connectors)

LLO-160




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	315x76x150	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	23°	433lm	IP65		

LLO-163




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	348x165x92	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	23°	864lm	IP65		

LLO-170



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	380x73x107	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	24°	436lm	IP65		

LLO-175




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	210x247x120	AC COB	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	41°	934lm	IP65		

LED Garden Light Fixture With Spike/base(IP68 Connectors)




LLO-173



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x2W	70x80x117/210x50	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	27°	460lm	IP65		

LLO-174




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
1x7W	70x80x117/210x50	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	39°	602lm	IP65		

LED Outdoor Concealed Step Light Fixtures




LLO-176




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	66x45x190	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	300-360lm	IP65		

LLO-177



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	100x66x200	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	520-660lm	IP65		

LLO-178




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	100x66x200	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	1050-1300lm	IP65		

LED Outdoor Concealed Step Light Fixtures




LLO-179




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	30x65	CREE	Aluminium	Silver Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15°	140lm/w	IP65		

LLO-180



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	36x85	CREE	Aluminium	Silver Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15°	140lm/w	IP65		


LLO-181



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	50x120	CREE	Aluminium	Silver Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15°	140lm/w	IP65		


LED Outdoor Fixtures-spike/surface

LLO-179A
WITH HOOD

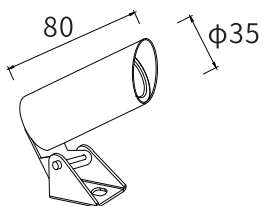


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	Ø35x80	/	Aluminium	Dark Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	OSRAM	220lm	IP65	

LLO-180A
WITH HOOD

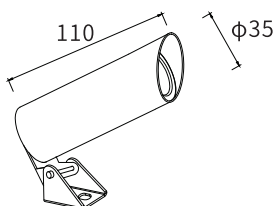

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	Ø35x110	/	Aluminium	Dark Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	Bridgelux	560lm	IP65	


LLO-181A
WITH HOOD

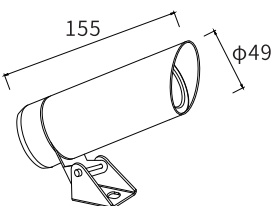

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
10W	Ø49x155	/	Aluminium	Dark Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	Bridgelux	900lm	IP65	


LED Outdoor Fixtures-spike/surface

LLO-182




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	90x139x173	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	13°	1077lm	IP65		

LLO-183




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	88x153x317	CREE	Aluminium+glass	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	13°	1077lm	IP65		

LLO-184




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	198x78	CREE	Aluminium/PMMA	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	18-45°	636lm	IP54		

LLO-185



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	332x164x77	CREE	Aluminium/PMMA	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	18-45°	636lm	IP54		

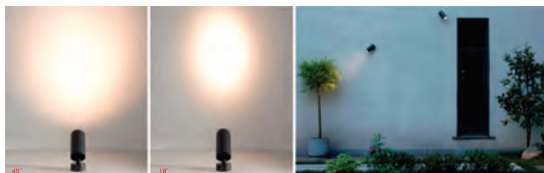


100-240V
50-60Hz




LED Outdoor Fixtures-spike/surface

LLO-186



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
20W	Ø60x128	Bridgelux	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
>80	15°	1800lm	IP65		

LLO-190




Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
6W	90x90x75	CREE	Aluminium	Dark Grey	2700K
CRI	Beam Angle	Luminous Flux	IP		
>80	15°	680lm	IP65		




LED Outdoor Fixtures-spike/surface

LLO-187

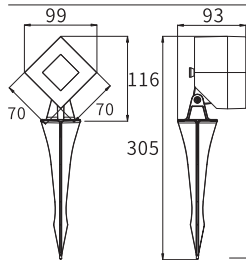


Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
7W	99x93x305	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	/	/	IP65		

LLO-188

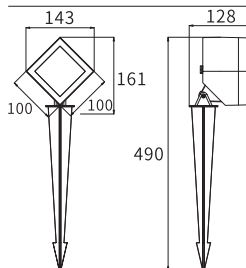

Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
20W	143x128x490	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	/	/	IP65		


LLO-189

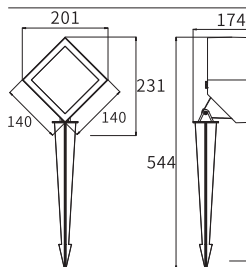

Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
30W	201x174x544	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	/	/	IP65		


Gu-10 Outdoor Spike Fixture's

LGLS-003




Watt	Dimension(mm)	Material	Body color	IP
MAX 20W	122x138x486	Aluminum	Dark Grey	IP65

LGLS-004




Watt	Dimension(mm)	Material	Body color	IP
Max.35W	115x60x245	Aluminum+ Glass	Dark Grey	IP65

LGLS-005




Watt	Dimension(mm)	Material	Body color	IP
Max.8W	110x50x254	ABS+PC	Dark Grey	IP65

LGLS-006




Watt	Dimension(mm)	Material	Body color	IP
Max.8W	130x80x273	ABS+PC	Dark Grey	IP65

LGLS-007



Watt	Dimension(mm)	Material	Body color	IP
Max.35W	109x98x331	Aluminum+ Glass	Dark Grey	IP65

Outdoor Underwater Lights-24v With IP68 Connector-without Driver

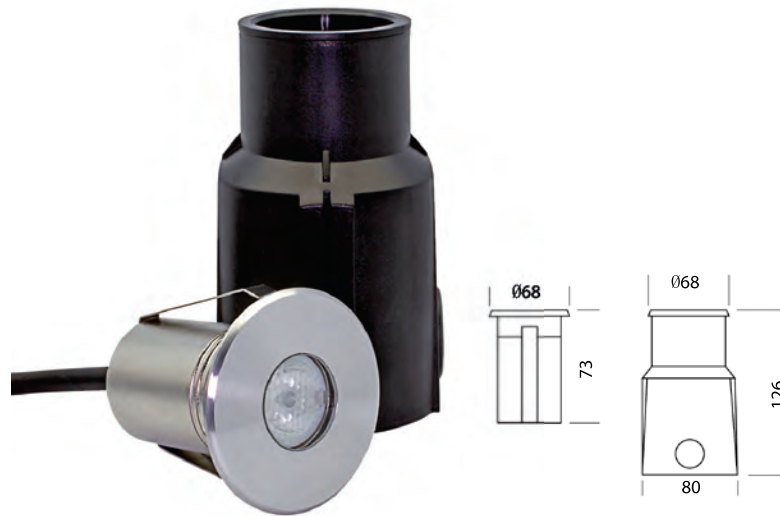



LSP001



LSP005



LSP009

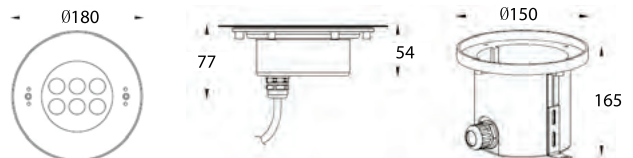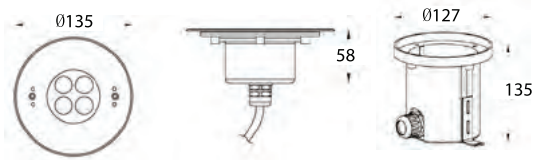


LSP-001/005/009



Item	Watt	Dimension (mm)	Cut-Out (mm)	LED chip	Material	Body color	CCT	CRI	Beam Angle	IP	Voltage
LSP-001	2w	68x73 68x 126x80	80x126	OSRAM	316# stainless steel	Silver	3000K	≥80	30°	IP68	24V
LSP-005	4x2w	135x58	127x 135	OSRAM	316# stainless steel	Silver	3000K	≥80	30°	IP68	24V
LSP-009	6x2w	180x54	150x165	OSRAM	316# stainless steel	Silver	3000K	≥80	30°	IP68	24V

Outdoor Underwater Lights-24v With IP68 Connector-without Driver

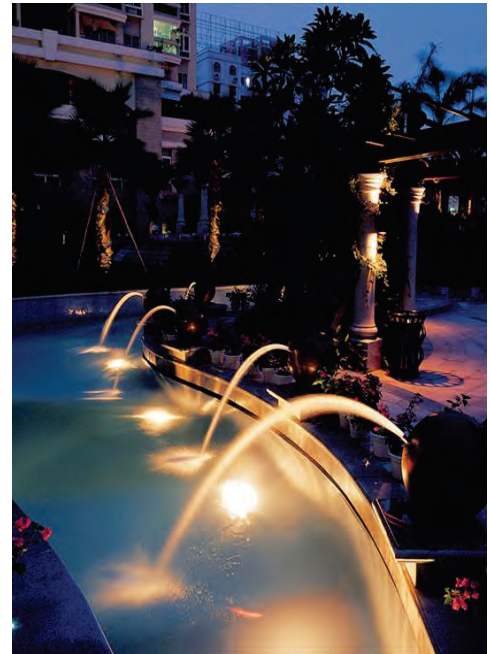

- 1: Not to be switched on(Even for testing purpose)if the fixture is not under water
- 2: not to cut the IP68 cable provided by the manufacturer


EPISTAR OSRAM



100-240V
50-60Hz


Outdoor Underwater Lights-24v With IP68 Connector-without Driver

LSP-021




Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
1x2W	70x70x67.5	OSRAM	316# Stainless Steel	Stainless Steel	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	30°	262.5lm	IP66		

LSP-023




Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
3x2W	161x38x90	OSRAM	316# Stainless Steel	Stainless Steel	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	30°	/	IP68		

LSP-028



Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
3x1W	52x85	Bridgelux	Aluminium	Silver	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	80°	/	IP66		

LSP-029

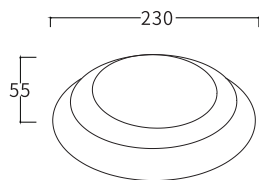


Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
12W	Ø230x55	OSRAM	Stainless Steel	Stainless Steel	3000K/6000K/Blue
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	980lm	IP66		


LED Bollard's/wall Light



LED Bollard's/wall Light

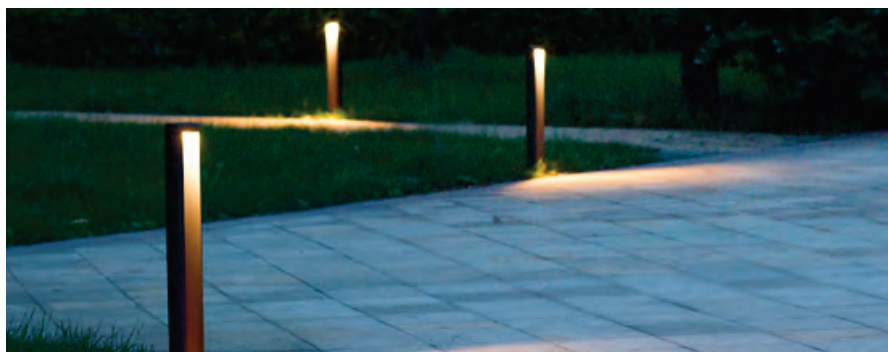


LB-032



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	250x90	CREE	Aluminium+glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	55°	477lm	IP54		

LB-033



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	450x90	CREE	Aluminium+glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	55°	477lm	IP54		

LB-034



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x90	CREE	Aluminium+glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	55°	477lm	IP54		

LED Bollard's/wall Light


LED BOLLARD'S/ WALL LIGHT

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs




LED Bollard's/wall Light

LB-036



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	230x180	CREE	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	360°	870lm	IP54		

LB-037




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	500x180	CREE	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	360°	1100lm	IP54		



LED Bollard's/wall Light

LB-038




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	300x160x54	CREE	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	329°	497lm	IP54		

LB-039




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x160x54	CREE	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	329°	497lm	IP54		

LB-063




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	300x160x54	EVERLIGHT	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	117° /320°	433lm	IP54		

LB-064





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	650x160x54	EVERLIGHT	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	117° /320°	433lm	IP54		

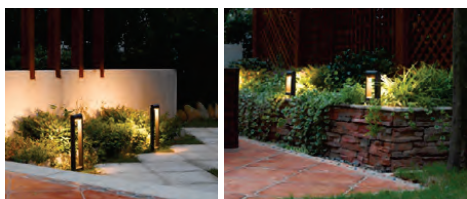

LED Bollard's/wall Light




LB-042



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	600x75x75	Philips AC LED	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	43°	195lm	IP54		

LB-054




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
5W	600x75x75	Philips AC LED	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	42°	98lm	IP54		

200-240V
50-60Hz

PHILIPS

LED Bollard's/wall Light

LB-088



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	600x120x82	Philips AC LED	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	52°	526lm	IP54		


LB-096




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	500x141x141	Philips AC LED	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	47°	858lm	IP54		



LED Bollard's/wall Light

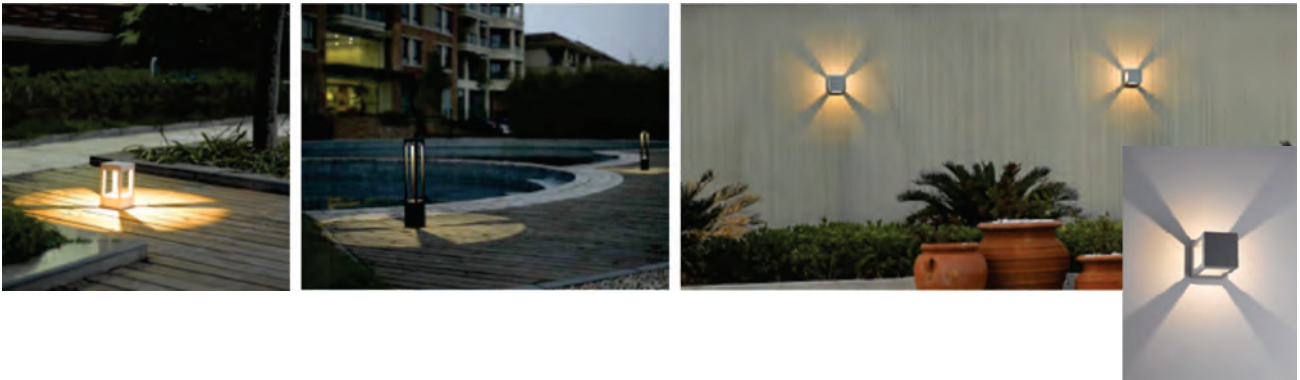


LL0-014




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	160x108x108	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	353lm	IP54		

LB-058



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	200x108x108	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	38°	400lm	IP54		

LB-059




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x108x108	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	29°	356lm	IP54		

LED Bollard's/wall Light




LL0-097




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	175x120x40	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	160°	290lm	IP54		

LB-056



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	350x120x40	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	45°	290lm	IP54		

LB-057




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x120x40	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	45°	290lm	IP54		

LED Bollard's/wall Light




LLO-070




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	239.5x110x176	EVERLIGHT-AC LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	185°	659lm	IP65		

LB-072



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	500x110	EVERLIGHT-AC LED	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	185°	659lm	IP65		

LB-073




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	900x110	EVERLIGHT-AC LED	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	185°	659lm	IP65		

100-240V
50-60Hz

EVERLIGHT


LED Bollard's/wall Light

LL0-076

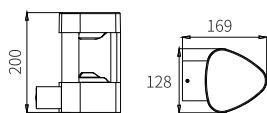


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	200x128x169	OSRAM	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	175°	215lm	IP54		

LB-074

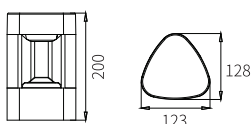


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	200x128x123	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	175°	201lm	IP54		

LB-075



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	500x128x123	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	175°	258lm	IP54		

LB-076




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	800x128x123	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	175°	254lm	IP54		

LED Bollard's/wall Light




LLO-079C

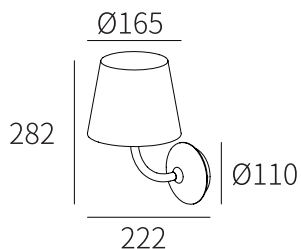

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	222x282x165	Philips	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	105°	555lm	IP65		

LB-108

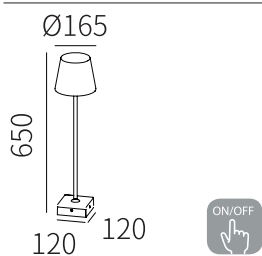


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	165x650x120	Philips	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	47°	565lm	IP65		

LED Bollard's/wall Light




LED Bollard's/wall Light

LLO-038



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	160x90	CREE	Die-cast Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	40°	423lm	IP54		

LB-083



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	200x90	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	40°	419lm	IP54		


LB-084



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
7W	650x90	CREE	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	40°	420lm	IP54		

LED Bollard's wall Light

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

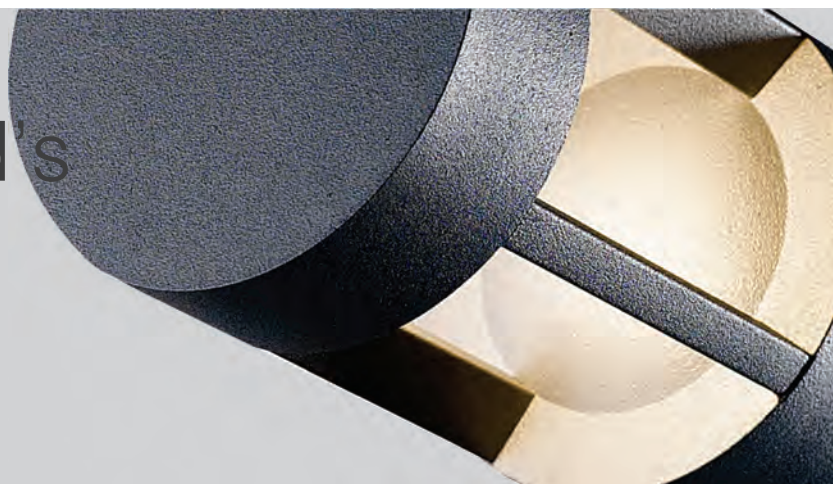

200-240V
50-60Hz




LED Bollard's/wall Light





LED Bollard's/wall Light

LB-100




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
10W	300x151x151	OSRAM	Die-cast Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	197°	290lm	IP54		

LB-101



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	500x151x151	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	270°	580lm	IP54		

LB-102



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	800x151x151	OSRAM	Aluminium	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	270°	580lm	IP54		




LED Outdoor Bollards

LED Outdoor Bollards

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs




LB-122



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	145x500	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	1062lm	IP54		

LB-123




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	145x900	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	1062lm	IP54		

LED Outdoor Bollards




LB-124



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	500x147	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	814lm	IP54		

LB-125



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	900x147	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	814lm	IP54		

EVERLIGHT

LED Outdoor Bollard's/wall Lights


Control different scenes, flexibly compatible
with various spaces

A variety of specifications to meet individual needs




LED Outdoor Bollard's/wall Lights

LLO-079D




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	135x131x101	EVERLIGHT	Aluminium+PC	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	439lm	IP54		

LB-126




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	101x250	EVERLIGHT	Aluminium+PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	439lm	IP65		

LB-127




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	101x500	EVERLIGHT	Aluminium+PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	439lm	IP54		

LB-128




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	101x750	EVERLIGHT	Aluminium+PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	439lm	IP54		

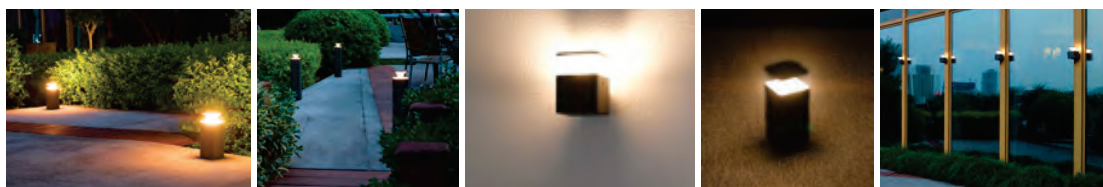

EVERLIGHT


LED Outdoor Bollard's/wall Lights

LB-137




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	Ø107x400	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP65		

LB-138




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	Ø107x600	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP65		

LB-139



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	Ø107x800	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP65		


LLO-079P



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	107x120x275	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	540lm	IP65		


LED Outdoor Bollard's/wall Lights

LLO-079Q




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	150x100x100	EPISTAR	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	720lm	IP65		

LB-140




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	100x100x500	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	720lm	IP65		

LB-141



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	100x100x800	EPISTAR	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	720lm	IP65		

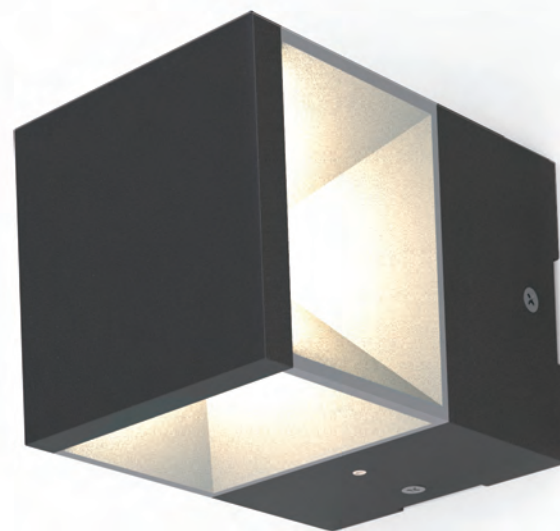

EPISTAR

LED Outdoor Bollard's/wall Lights

LB-146



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	178x69x300	CREE LED	Aluminum + PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	296°	894lm	IP65		

LB-147



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	178x69x650	CREE LED	Aluminum + PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	296°	894lm	IP65		


LED Outdoor Bollard's/wall Lights

Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs




LED Outdoor Bollard's/wall Lights

LB-148



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
24W	276x140x430	EVERLIGHT SMD LED	Aluminum + PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	144°	1850lm	IP65		

LB-149




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
24W	276x75x380	EVERLIGHT SMD LED	Aluminum + PC	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	144°	1850lm	IP65		

LB-129



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	240x260	SMD-EVERLIGHT	Aluminium+pc	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	1118lm	IP54		


LB-175



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6.5W	Ø140x99	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	120°	/	/	IP65	


LED Outdoor Bollard's/wall Lights

LB-150




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	161x55x250	CREE LED	Aluminium /PMMA	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	28°	345lm	IP65		

LB-151




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	166 x 55 x800	CREE LED	Aluminium /PMMA	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	28°	690lm	IP65		

LB-157



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	120x900	CREE LED	Aluminium/Glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	24°	514lm	IP54		

LB-158




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	120x700	CREE LED	Aluminium/Glass	Graphite Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	21°	223lm	IP54		

LED Outdoor Bollard's/wall Lights




LB-152



Watt	Dimension(mm)	LED	Material	Body color
6W	220x270	SMD LED	Aluminium+Iron/PC	Graphite Black
CRI	Beam Angle	Luminous Flux	IP	
≥ 80	174°	429lm	IP65	

LB-153




Watt	Dimension(mm)	LED	Material	Body color
12W	360x574	SMD LED	Aluminium+Iron/PC	Graphite Black
CRI	Beam Angle	Luminous Flux	IP	
≥ 80	154°	992lm	IP65	

110-130V
50-60Hz

200-240V
50-60Hz



LED Outdoor Bollard's/Wall Lites

LB-154





Watt	Dimension(mm)	LED	Material	Body color
6W	78x1500	CREE LED	Aluminium/Glass	Graphite Black
CRI	Beam Angle	Lumens	IP	
≥ 80	36°	596lm	IP54	

LB-155



Watt	Dimension(mm)	LED	Material	Body color
12W	201x489x2012	CREE LED	Aluminium/Glass	Graphite Black
CRI	Beam Angle	Lumens	IP	
≥ 80	36°	1190lm	IP54	

LB-156



Watt	Dimension(mm)	LED	Material	Body color
24W	326x404x2012	CREE LED	Aluminium/Glass	Graphite Black
CRI	Beam Angle	Lumens	IP	
≥ 80	36°	1780lm	IP54	




100-240V
50-60Hz



LED Outdoor Bollard's/Wall Lites




LLO-079S



Watt	Dimension(mm)	LED	Material	Body color
10W	180x62	SMD LED	Aluminium/PC	Dark Grey
CRI	Beam Angle	Lumens	IP	
≥ 80	99°	936lm	IP54	

LB-159





Watt	Dimension(mm)	LED	Material	Body color
10W	180x500	SMD LED	Aluminium/PC	Graphite Black
CRI	Beam Angle	Lumens	IP	
≥ 80	97°	761lm	IP54	

220-240V
50-60Hz



LED Outdoor Bollard's/Wall Lites

LB-163





Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
13W	164x47x400	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	219°	OSRAM	487lm	IP65	

LB-163A

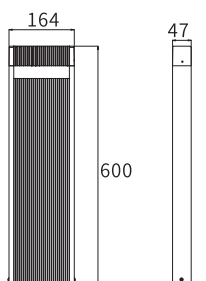

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
13W	164x47x400	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	219°	OSRAM	487lm	IP65	


LB-163B

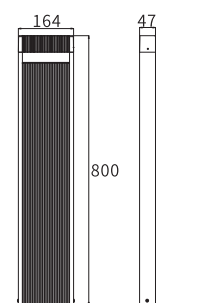

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
13W	164x47x800	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	219°	OSRAM	487lm	IP65	


LED Outdoor Bollard's/Wall Lites

LLO-079W

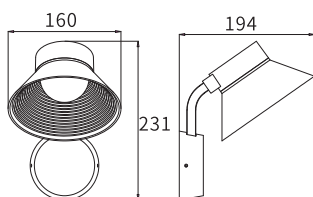


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	160x194x231	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	/	OSRAM	/	IP65	

LB-161



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	160x244x400	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	/	OSRAM	/	IP65	


LB-161A

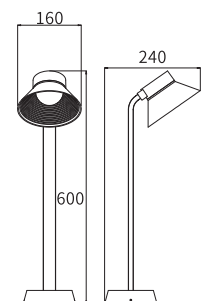

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	160x244x600	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	/	OSRAM	/	IP65	

LED Outdoor Bollard's/Wall Lites

LB-164

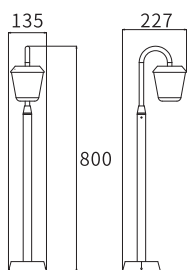


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
13W	135x227x800	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	186°	OSRAM	660lm	IP65	



LED Outdoor Bollard's/Wall Lites





LB-167
CASTING WITH GLASS

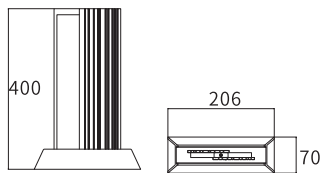

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	400x70x206	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	327°	OSRAM	458lm	IP65	

LB-167A

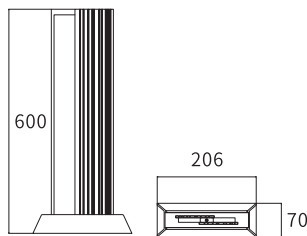


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	900x70x206	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	327°	OSRAM	458lm	IP65	

LED Outdoor Bollard's/Wall Lites



LB-168



CASTING WITH GLASS

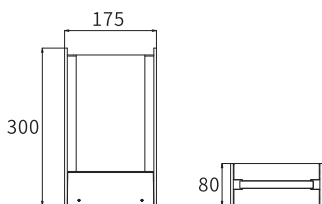

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	300x80x175	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	257°	OSRAM	492lm	IP65	

LB-168A


CASTING WITH GLASS

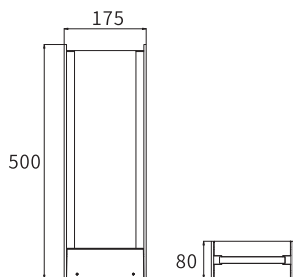

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	500x80x175	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	284°	OSRAM	460lm	IP65	

LED Outdoor Bollard's/Wall Lites



LB-169



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	Ø430x438	Surface	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	/	/	487lm	IP65	

LB-170


MOVABLE

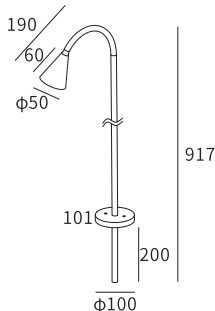

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	190x820	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	Bridgelux	/	IP65	

LB-171


MOVABLE

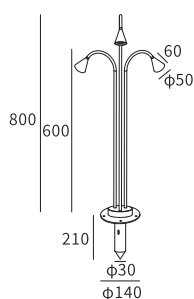

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3x4.5W	1010xØ140	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	45°	Bridgelux	/	IP65	


LED Outdoor Bollard's/Wall Lites

LB-172
MOVING HEAD




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø40x400	Surface	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	60°	CREE	/	IP65	

LB-173
MOVING HEAD



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2x3W	Ø40x800	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	60°	CREE	/	IP65	


LB-174
MOVING HEAD

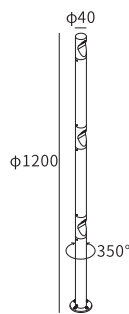

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3x2W	Ø40x1200	/	Aluminium	Sand Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	60°	CREE	/	IP65	


E-27 Bollard's/wall Lites

LB-001



Watt	Dimension(mm)	LED	Material	Body color
18W	200x110	E27 HOLDER	Aluminium+glass	Graphite Black
CRI ≥80	IP IP44			

LB-002



Watt	Dimension(mm)	LED	Material	Body color
18W	650x110	E27 HOLDER	Aluminium+glass	Graphite Black
CRI ≥80	IP IP44			




110-130V
50-60Hz

200-240V
50-60Hz

CE **RoHS** **REACH**
COMPLIANT


E-27 Bollard's/wall Lites

LB-003




Dimension(mm)	LED	Material	Body color	CRI	IP
200x110	E27 HOLDER	Aluminium+glass	Graphite Black	≥80	IP44

LB-004




Dimension(mm)	LED	Material	Body color	CRI	IP
650x110	E27 HOLDER	Aluminium+glass	Graphite Black	≥80	IP44

LB-005



Dimension(mm)	LED	Material	Body color	CRI	IP
220x270	E27 HOLDER	Aluminium+glass	Graphite Black	≥80	IP44

LB-006




Dimension(mm)	LED	Material	Body color	CRI	IP
220x150	E27 HOLDER	Aluminium+glass	Graphite Black	≥80	IP44

E-27 Bollard's/wall Lites




LB-119




Dimension(mm)	LED	Material	Body color	CRI	IP
227x227x255	E27 HOLDER	Aluminium+pc	Graphite Black	≥80	IP65

LB-120



Dimension(mm)	LED	Material	Body color	CRI	IP
170x170x210	E27 HOLDER	Aluminium+pc	Graphite Black	≥80	IP65

LB-121




Dimension(mm)	LED	Material	Body color	CRI	IP
350x350x395	E27 HOLDER	Aluminium+pc	Graphite Black	≥80	IP65

100-240V
50-60Hz

E-27 Bollard's/wall Lites




LB-021

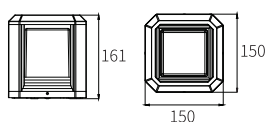


Dimension(mm)	LED	Material	Body color
150x150x161	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥80	IP IP65		

LB-022

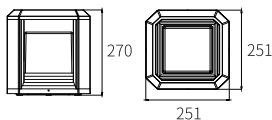

Dimension(mm)	LED	Material	Body color
251x251x270	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥80	IP IP65		

LB-166

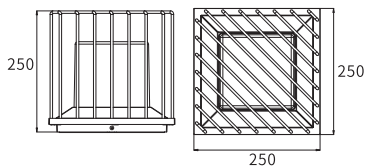

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	250x250x250	/	Aluminium	Sand Black	3000K
CRI >80	Beam Angle 238°	LED Chip OSRAM	Luminous Flux 1474lm	IP IP65	


E-27 Bollard's/wall Lites



E-27 Bollard's/wall Lites


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

LB-007



Dimension(mm)	LED	Material	Body color
200x220	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥ 80	IP IP44		

LB-008



Dimension(mm)	LED	Material	Body color
650x220	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥ 80	IP IP44		

110-130V
50-60Hz


200-240V
50-60Hz

CE **RoHS** **REACH**
COMPLIANT

E-27 Bollard's/wall Lites




LWL-004




Dimension(mm)	LED	Material	Body color
220x200x277	E27 HOLDER	Aluminium+pc	Black
CRI ≥80	IP IP44		

LB-013



Dimension(mm)	LED	Material	Body color
200x220	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥80	IP IP44		

LB-014




Dimension(mm)	LED	Material	Body color
650x220	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥80	IP IP44		


110-130V
50-60Hz

200-240V
50-60Hz

E-27 Bollard's/wall Lites

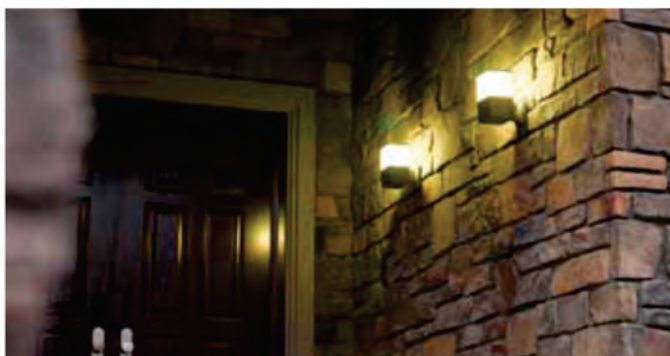


LWL-002




Dimension(mm)	LED	CRI	Material	IP	Body color
108x178x202	E27 HOLDER	≥80	Aluminium+pc	IP44	Black

LB-011



Dimension(mm)	LED	CRI	Material	IP	Body color
200x108	E27 HOLDER	≥80	Aluminium+pc	IP44	Graphite Black

LB-012



Dimension(mm)	LED	CRI	Material	IP	Body color
650x108	E27 HOLDER	≥80	Aluminium+pc	IP44	Graphite Black

110-130V
50-60Hz


200-240V
50-60Hz

CE **RoHS** **REACH**
COMPLIANT

E-27 Bollard's/wall Lites




LB-009



Dimension(mm)	LED	CRI	Material	IP	Body color
200x108	E27 HOLDER	≥80	Aluminium+pc	IP44	Graphite Black


LB-010



Dimension(mm)	LED	CRI	Material	IP	Body color
650x108	E27 HOLDER	≥80	Aluminium+pc	IP44	Graphite Black


E-27 Bollard's/wall Lites

LWL-036

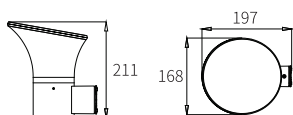


Dimension(mm)	LED	Material	Body color
211x168x197	E27 HOLDER	Aluminium+pc	Black
CRI ≥80	IP IP44		

LB-015




Dimension(mm)	LED	Material	Body color
300x168x175	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥80	IP IP44		

LB-016



Dimension(mm)	LED	Material	Body color
500x168x175	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥80	IP IP44		

LB-017




Dimension(mm)	LED	Material	Body color
800x168x175	E27 HOLDER	Aluminium+pc	Graphite Black
CRI ≥80	IP IP44		

E-27 Bollard's/wall Lites




E-27 Bollard's/wall Lites

LWL-007

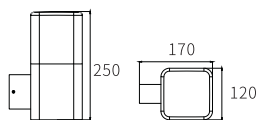


Watt	Dimension(mm)	LED	Material	Body color
23W	250x120x170	E27 HOLDER	Aluminium+pc	Black
CRI	IP			
≥80	IP44			

LB-018




Watt	Dimension(mm)	LED	Material	Body color
23W	300x120x120	E27 HOLDER	Aluminium+pc	Graphite Black
CRI	IP			
≥80	IP44			

LB-019



Watt	Dimension(mm)	LED	Material	Body color
23W	500x120x120	E27 HOLDER	Aluminium+pc	Graphite Black
CRI	IP			
≥80	IP44			

LB-020




Watt	Dimension(mm)	LED	Material	Body color
23W	800x120x120	E27 HOLDER	Aluminium+pc	Graphite Black
CRI	IP			
≥80	IP44			

E-27 Bollard's/wall Lites




LWL-035




Dimension(mm)	LED	Material	CRI	IP	Body color
250x128.5x172	E27 HOLDER	Aluminium+pc	≥80	IP44	Black

LB-026





Dimension(mm)	LED	Material	CRI	IP	Body color
300x128x123	E27 HOLDER	Aluminium+pc	≥80	IP44	Graphite Black

LB-027



Dimension(mm)	LED	Material	CRI	IP	Body color
500x128x123	E27 HOLDER	Aluminium+pc	≥80	IP44	Graphite Black


LB-028



Dimension(mm)	LED	Material	CRI	IP	Body color
800x128x123	E27 HOLDER	Aluminium+pc	≥80	IP44	Graphite Black


E-27 Bollard's/wall Lites

LB-023




Dimension(mm)	LED	Material	CRI	IP	Body color
300x101.8x104.1	E27 HOLDER	Aluminium+ pc	≥80	IP44	Graphite Black

LB-024



Dimension(mm)	LED	Material	CRI	IP	Body color
500x101.8x104.1	E27 HOLDER	Aluminium+ pc	≥80	IP44	Graphite Black

LB-025




Dimension(mm)	LED	Material	CRI	IP	Body color
800x101.8x104.1	E27 HOLDER	Aluminium+ pc	≥80	IP44	Graphite Black



100-240V
50-60Hz


E-27 Bollard's/wall Lites

LB-029




Dimension(mm)	LED	Material	CRI	IP	Body color
300x100x100	E27 HOLDER	Aluminium+pc	≥80	IP44	Graphite Black

LB-029A



Dimension(mm)	LED	Material	CRI	IP	Body color
500x100x100	E27 HOLDER	Aluminium+pc	≥80	IP44	Graphite Black


LB-029B



Dimension(mm)	LED	Material	CRI	IP	Body color
800x100x100	E27 HOLDER	Aluminium+pc	≥80	IP44	Graphite Black

E-27 Bollard's/ wall Lites


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs

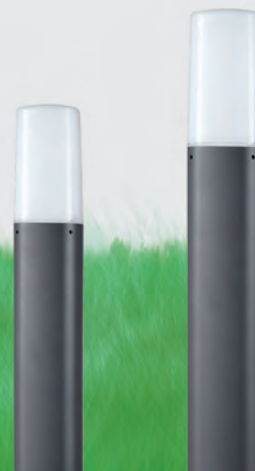

E-27 Bollard's/wall Lights




LWL-051




Dimension(mm)	LED	Material	Body color	CRI	IP
276x160x215	E27 HOLDER	Die-cast Aluminium	Black	≥80	IP65

LB-113




Dimension(mm)	LED	Material	Body color	CRI	IP
220x160x215	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

LB-114



Dimension(mm)	LED	Material	Body color	CRI	IP
350x160	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

LB-115




Dimension(mm)	LED	Material	Body color	CRI	IP
500x160	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

100-240V
50-60Hz

E-27 Bollard's/wall Lights




LWL-052




Dimension(mm)	LED	Material	Body color	CRI	IP
276x145x215	E27 HOLDER	Die-cast Aluminium	Black	≥80	IP65

LB-116




Dimension(mm)	LED	Material	Body color	CRI	IP
145x145x220	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

LB-117



Dimension(mm)	LED	Material	Body color	CRI	IP
145x145x350	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

LB-118




Dimension(mm)	LED	Material	Body color	CRI	IP
145x145x500	E27 HOLDER	Die-cast Aluminium	Graphite Black	≥80	IP65

E-27 Bollard's/wall Lights



LWL-061




Dimension(mm)	Hoder	Material	Body color	IP
135x202x260	E27	Aluminium	Anthracite	IP54

LB-142



Dimension(mm)	Hoder	Material	Body color	IP
135x382	E27	Aluminium+pc	Graphite Black	IP54



LB-143

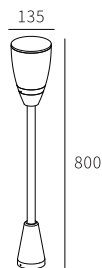

Dimension(mm)	Hoder	Material	Body color	IP
135x800	E27	Aluminium+pc	Graphite Black	IP54


E-27 Bollard's/wall Lights

LB-162

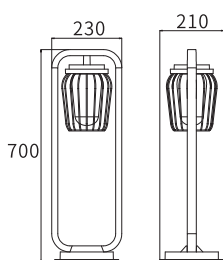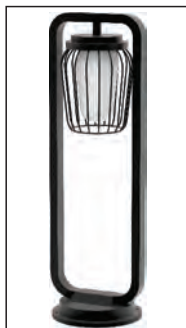


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
Max 23W	230x210x700	/	Aluminium	Dark Grey	/
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
/	/	E27	/	IP54	

LB-165

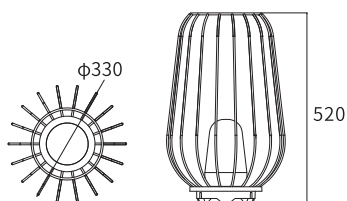

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
Max 23W	520xØ330	/	Aluminium	Dark Grey	/
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
/	/	E27	/	IP54	


LB-165A

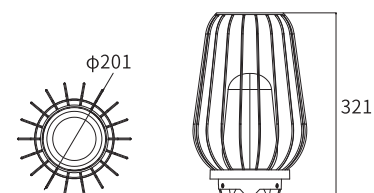

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
Max 23W	321xØ201	/	Aluminium	Dark Grey	/
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
/	/	E27	/	IP54	


E-27/gu-10 Outdoor Wall Light

LWL-041




Dimension(mm)	LED	Material	Body color	CRI	IP
220x220x82	E27 HOLDER	Aluminium+glass	Black	≥80	IP54

LWL-042




Dimension(mm)	LED	Material	Body color	CRI	IP
256x86x88	E27 HOLDER	Aluminium+glass	Black	≥80	IP54

LWL-043



Dimension(mm)	LED	Material	Body color	CRI	IP
265x95x90	E27 HOLDER	Aluminium+glass	Black	≥80	IP54


LWL-044



Dimension(mm)	LED	Material	Body color	CRI	IP
256x86x88	E27 HOLDER	Aluminium+glass	Black	≥80	IP54


E-27/gu-10 Outdoor Wall Light

LWL-045




Dimension(mm)	LED	Material	Body color	CRI	IP
108x90	GU10	Aluminium+glass	Black	≥80	IP54

LWL-047



Dimension(mm)	LED	Material	Body color	CRI	IP
108x120x90	GU10	Aluminium+glass	Black	≥80	IP54

LWL-049



Dimension(mm)	LED	Material	Body color	CRI	IP
155x120x90	GU10	Aluminium+glass	Black	≥80	IP54

E-27/Gu-10 Outdoor Wall Light


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs



100-240V
50-60Hz


E-27/gu-10 Outdoor Wall Light

LWL-046




Dimension(mm)	LED	Material	Body color	CRI	IP
108x85x85	GU10	Aluminium+glass	Black	≥80	IP54

LWL-048



Dimension(mm)	LED	Material	Body color	CRI	IP
108x115x85	GU10	Aluminium+glass	Black	≥80	IP54



LWL-050



Dimension(mm)	LED	Material	Body color	CRI	IP
155x115x85	GU10	Aluminium+glass	Black	≥80	IP54




LED Pole Lights

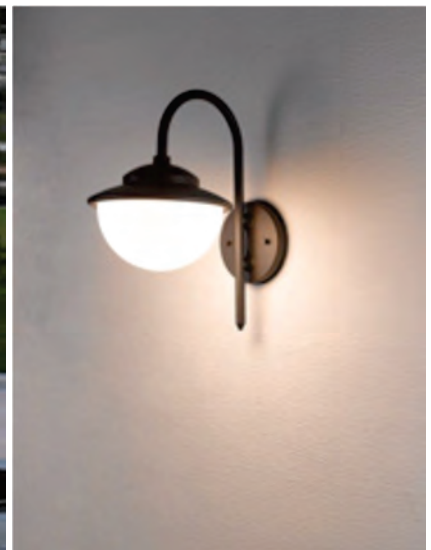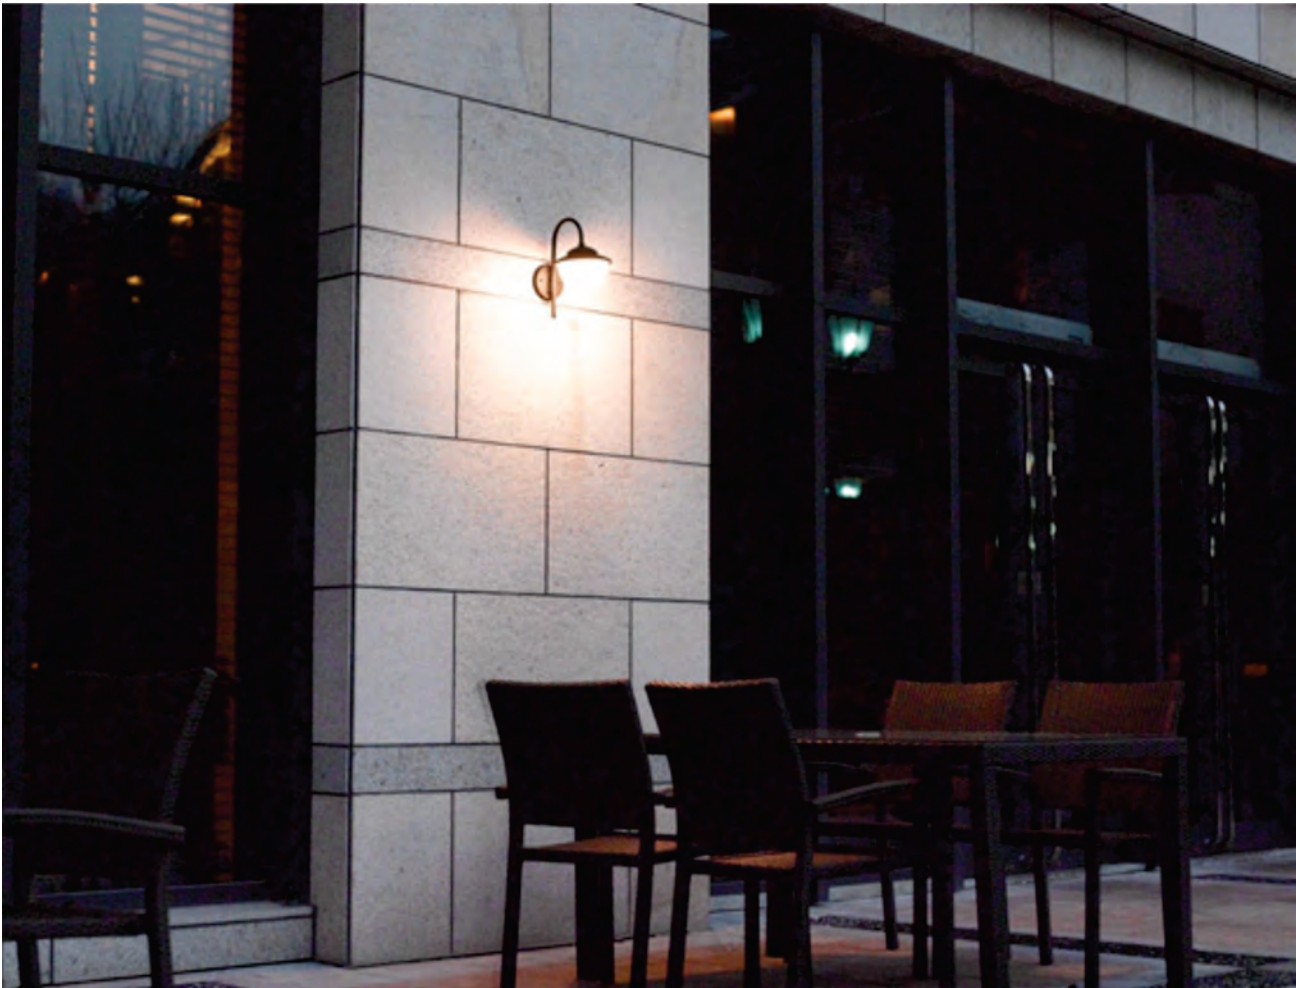


LED Pole Lights

LLO-072





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	335x280x196	EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	132°	1088lm	IP54		

LPL-004

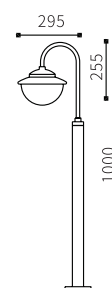

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	1000x295	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	132°	1088lm	IP54		



LPL-005

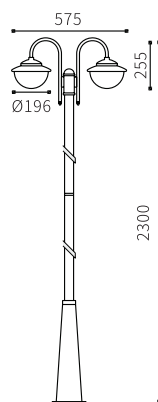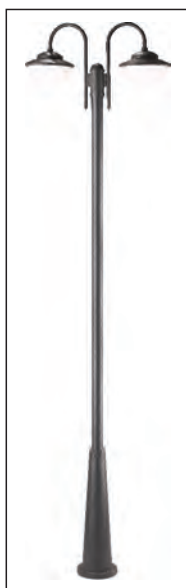

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x9W	2300x575	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	132°	2177lm	IP54		


LED Pole Lights

LPL-006

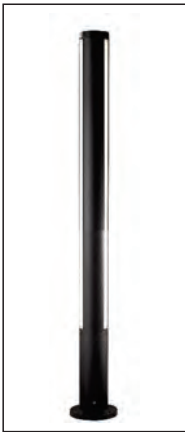

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	1250x120x80	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	354°	1070lm	IP54		

LPL-008




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
9W	750x120x80	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	354°	535lm	IP54		



LED Pole Lights



LPL-007





Watt	Dimension(mm)	LED chip	Material	Body color	CCT
27W	2000x120x80	EVERLIGHT	Aluminium+pc	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	354°	1600lm	IP54		

100-240V
50-60Hz

EVERLIGHT   **REACH**

LED Pole Lights

LPL-010

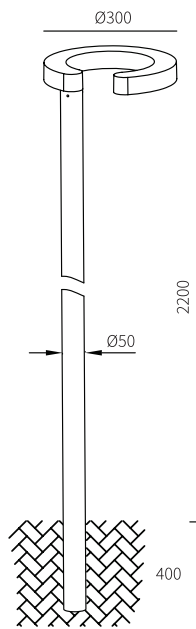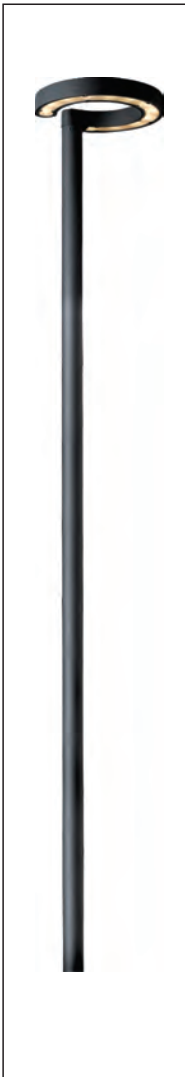


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12x2W	2200x300	CREE	Die-cast Aluminium	Black	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	54°	879lm	IP54		



LED Pole Lights

LPL-011

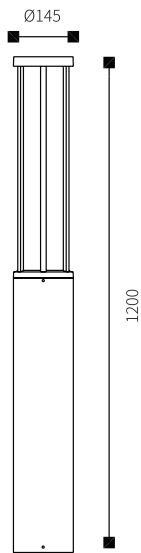


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
36W	145x1200	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	2300lm	IP54		



EVERLIGHT

LED Pole Lights

LPL-012

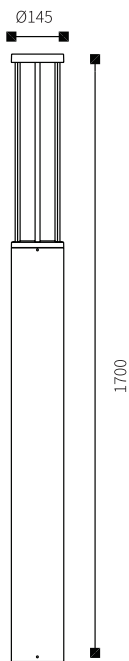


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	145x1700	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	2300lm	IP54		



EVERLIGHT

LED Pole Lights

LPL-013

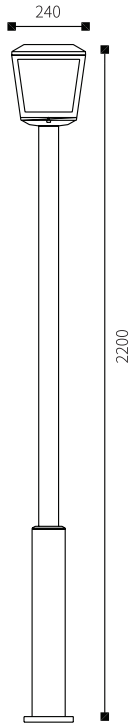

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	240x2200	SMD-EVERLIGHT	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	360°	1118lm	IP54		




100-240V
50-60Hz

EVERLIGHT

LED Pole Lights

LPL-015

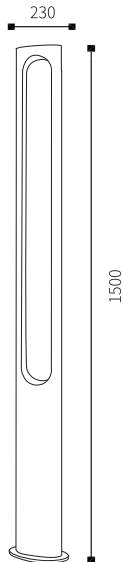

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
18W	230x69x1500	CREE LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	328°	1559lm	IP65		




100-240V
50-60Hz



LED Pole Lights

LPL-018

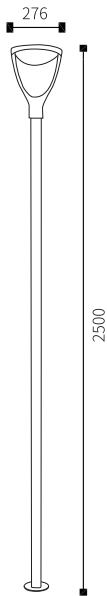


Watt	Dimension(mm)	LED chip	Material	Body color	CCT
24W	276x140x2500	SMD LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	144°	1850lm	IP65		



100-240V
50-60Hz


LED Pole Lights

LLO-079R




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	170x237x430	SMD LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	301°	620lm	IP54		

LPL-016

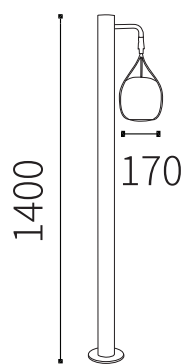

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	170x336x1400	SMD LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	301°	620lm	IP54		


LPL-017

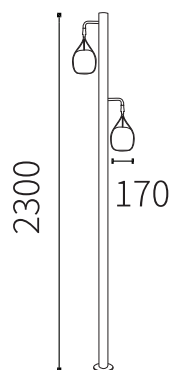

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
24W	170x532x2300	SMD LED	Aluminium+pc	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	301°	1240lm	IP54		


LED Pole Lights

LPL-019

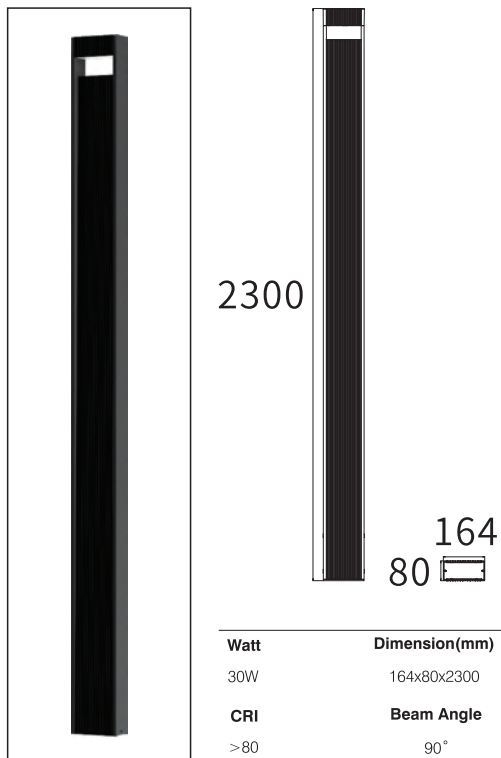

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
30W	164x80x2300	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	OSRAM	2029lm	IP65	

LPL-020

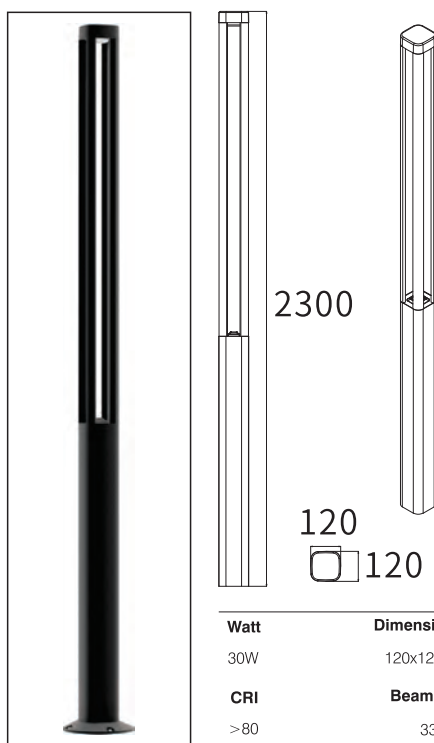

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
30W	120x120x2300	/	Aluminium	Dark Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	334°	OSRAM	1323lm	IP65	

LED Pole Lights



LED OUTDOOR POLE LIGHTS SERIES

Minimalist design, exquisite and durable
Villa courtyard, terrace garden
suitable for multiple scenarios




LED Pole Lights

LPL-021
RIBBED PRISMATIC

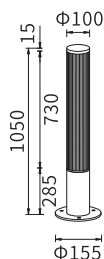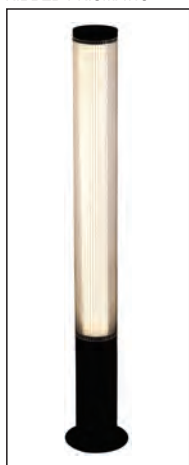


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
59W	155x1050	/	Aluminium+Acrylic	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
> 80	360°	SMD	5162.5lm	IP65	

LPL-021
RIBBED PRISMATIC

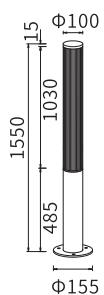

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
84W	155x1550	/	Aluminium+Acrylic	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
> 80	360°	SMD	7350lm	IP65	

LPL-023
RIBBED PRISMATIC

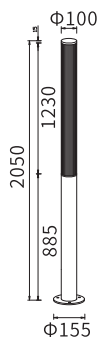

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
100W	155x2050	/	Aluminium+Acrylic	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
> 80	360°	SMD	8750lm	IP65	

LED OUTDOOR WOODEN FINISH - WALLITE'S

LED OUTDOOR WOODEN LIGHTS SERIES

— —


Highlight minimalist wall lamp
Wide range of lighting/waterproof/easy to install



LED OUTDOOR WOODEN FINISH - WALLITE'S




LWO-001
UP/DOWN



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	500x65x60	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	107°	PHILIPS SMD 2835	1742lm	IP65	

LWO-002
ONEWAY



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	500x65x60	/	Aluminium+SPC	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	107°	PHILIPS SMD 2835	1263lm	IP65	

LED OUTDOOR WOODEN FINISH - WALLLITE'S

LWO-003


UP/DOWN



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	250x65x60	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	PHILIPS SMD 2835	1140lm	IP65	

LWO-004


ONEWAY

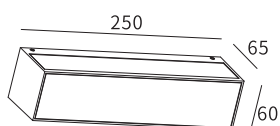

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	250x65x60	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	PHILIPS SMD 2835	668lm	IP65	

LWO-005

UP/DOWN




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	250x105x110	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	112°	PHILIPS SMD 2835	416lm	IP54	

LED OUTDOOR WOODEN FINISH - WALLITE'S

LWO-006


UP/DOWN



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
14W	62x87x144	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	73°	CREE 1304	1365lm	IP54	

LWO-007


UP/DOWN



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	90x90x115	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	22°/90°	PHILIPS SMD 2835	460lm	IP54	

LWO-008

UP/DOWN




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
14W	101x58x145	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	36°	PHILIPS SMD 2835	1108lm	IP54	

LED OUTDOOR WOODEN FINISH - WALLITE'S




LWO-009
ONEWAY



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5.5W	130x42x133	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	59°	PHILIPS SMD 2835	250lm	IP65	

LWO-010
BACKLIGHT




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	125x126x250	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	66°	PHILIPS SMD 2835	234lm	IP54	

LED OUTDOOR WOODEN FINISH - BOLLARD'S




LWO-101



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	175x157x300	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	49°	PHILIPS SMD 3014	300lm	IP54	


LWO-102

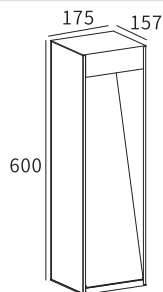

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	175x157x600	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	49°	PHILIPS SMD 3014	300lm	IP54	


LED OUTDOOR WOODEN FINISH - BOLLARD'S

LWO-103

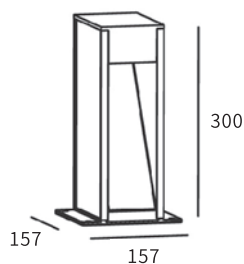


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	157x157x300	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	45°	PHILIPS SMD 4014	200lm	IP65	

LWO-104

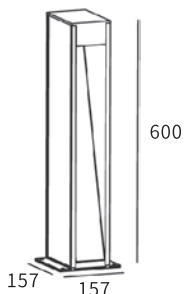

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	157x157x600	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	45°	PHILIPS SMD 4014	200lm	IP65	


LWO-105

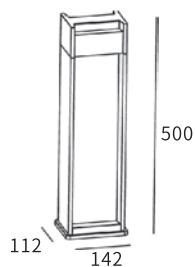

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	142x112x500	/	Aluminium+SPC	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	39°	PHILIPS SMD 2835	319lm	IP54	



LED OUTDOOR WOODEN FINISH - BOLLARD'S

LWO-106

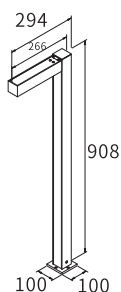


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	266x100x908	/	Aluminium	Black+Wood Grain	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	50°	OSRAM	435lm	IP54	

LWO-107

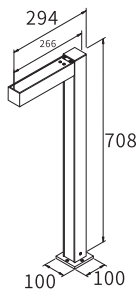

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	266x100x708	/	Aluminium	Black+Wood Grain	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	50°	OSRAM	435lm	IP65	

LWO-108

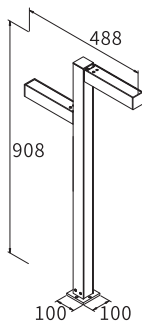

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	488x100x908	/	Aluminium	Black+Wood Grain	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	50°	OSRAM	810lm	IP65	

LED Outdoor Wall Washers




LLWW-001A




Watt	Dimension(mm)	LED	Material	Body color
6W	40x60x300	EPILEDs	Aluminium+pc	Black
CCT	CRI	Beam Angle	IP	
3000K	≥80	15° /45°	IP65	

LLWW-001



Watt	Dimension(mm)	LED	Material	Body color
18W	40x60x500	Bridgelux	Aluminium+pc	Black
CCT	CRI	Beam Angle	IP	
3000K	≥70	15° /45°	IP65	


LLWW-004



Watt	Dimension(mm)	LED	Material	Body color
36W	40x60x1000	Bridgelux	Aluminium+pc	Black
CCT	CRI	Beam Angle	IP	
3000K	≥80	15° /45°	IP65	


LED Outdoor Concealed Wall Washers

LLWW 014




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
9W	300x90x75	285x75	OSRAM	201 stainless steel	3000K
CRI	Beam Angle	Lumens	IP	Body color	
≥80	15°/45°	140LM/W	IP68	stainless steel	

LLWW 015




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
18W	500x90x75	485x75	OSRAM	201 stainless steel	3000K
CRI	Beam Angle	Lumens	IP	Body color	
≥80	15°/45°	140LM/W	IP68	stainless steel	

LLWW 016




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
36W	1000x90x75	985x75	OSRAM	201 stainless steel	3000K
CRI	Beam Angle	Lumens	IP	Body color	
≥80	15°/45°	140LM/W	IP68	stainless steel	

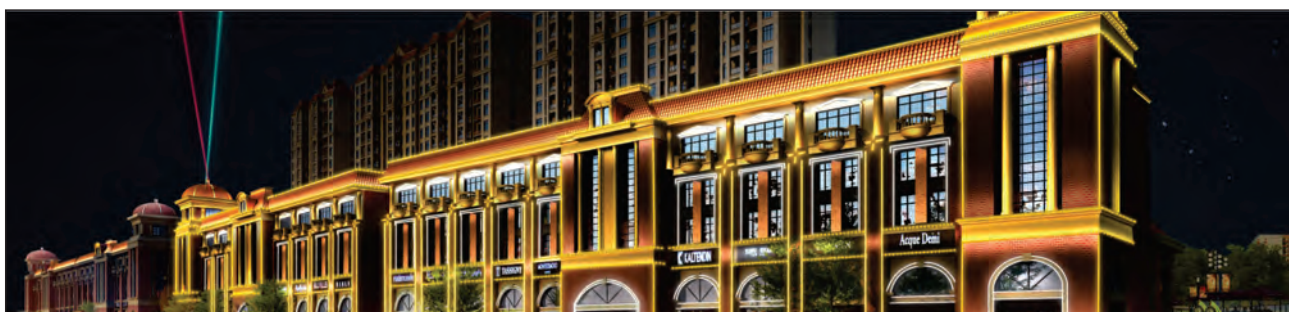


LED Outdoor Wall Washers

LLWW-010



Watt	Dimension(mm)	LED	Material	Body color	CCT
18W	120x120x80	CREE	Aluminium+pc	Silver Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥70	5° /25°	110-120lm/w	IP65		

LLWW-012



Watt	Dimension(mm)	LED	Material	Body color	CCT
25W	120x120x80	CREE	Aluminium+pc	Silver Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥70	5° /25°	110-120lm/w	IP65		



LED Outdoor Wall Washers



LLWW-007



Watt	Dimension(mm)	LED	Material	Body color	CCT
8W	140x145x105	CREE	Die-cast Aluminium	Silver Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5°	147lm/w	IP65		

LLWW-008



Watt	Dimension(mm)	LED	Material	Body color	CCT
20W	165x165x105	CREE	Die-cast Aluminium	Silver Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5°	149lm/w	IP65		

LLWW-009



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	150x90x42	/	Aluminium	Black	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	120x5°	CREE	180lm	IP65	

220-240V
50-60Hz


85-265V
50-60Hz



LED Outdoor Wall Washers




LLWW-019
CORNER/STAIR CASE

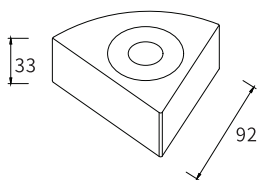

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	92x92x125x33	/	Aluminium	Iron Gray	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	120lm	IP65	

LLWW-020
STAIR CASE / ONE DIRECTIONAL PATHWAY

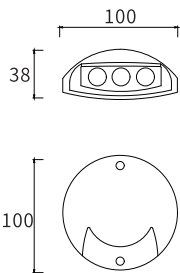


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø100x38	/	Aluminium	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	360lm	IP65	

LED Outdoor Wall Washers

LLWW-017


3x6W WINDOW LIGHT



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
18W	183x70x76	/	Aluminium	Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	5°x180°	CREE	1080lm	IP65	

LLWW-018


CORNER UP/SIDE LIGHT

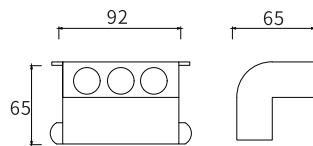

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	92x65x65	/	Aluminium	Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	720lm	IP65	

LLWW-021

BUILDING ELEVATION/WINDOW LIGHT ROTATABLE

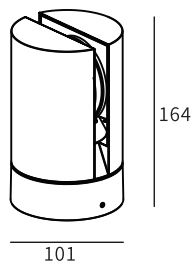

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	101x101x164	/	Metal	Graphite	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	52°	CREE	138lm	IP54	

220-240V
50-60Hz

85-265V
50-60Hz



24V LED OUTDOOR SERIES


24V LED OUTDOOR SERIES

Engineering grade waterproofing, encapsulated with adhesive
Safe and durable, fearless of long-term sun and rain exposure




24V LED OUTDOOR SERIES

LLO24V-1




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
24W	48x38x1000	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	3120lm	IP65	

LLO24V-2



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	48x38x500	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	1560lm	IP65	


LLO24V-3



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	48x38x300	/	ALUMINIUM	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	780lm	IP65	


24V LED OUTDOOR SERIES

LLO24V-7
WITH VISOR

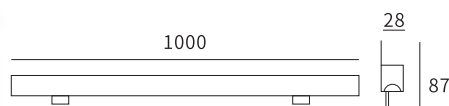


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
24W	28x87x1000	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	3120lm	IP65	

LLO24V-8
WITH VISOR

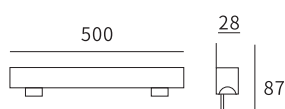

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	28x87x500	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	1560lm	IP65	


LLO24V-9
WITH VISOR

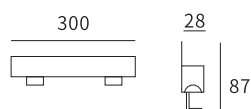

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	28x87x300	/	ALUMINIUM	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°/45°	OSRAM	780lm	IP65	


24V LED OUTDOOR SERIES

LLO24V-10
SMD LED-SLIM BODY




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	22x25x1000	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	30°/60°	OSRAM	1440lm	IP65	

LLO24V-11
SMD LED-SLIM BODY



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	22x25x500	/	Aluminium	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	30°/60°	OSRAM	720lm	IP65	


LLO24V-12
SMD LED-SLIM BODY



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	22x25x300	/	ALUMINIUM	Iron Grey	2200K/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	30°/60°	OSRAM	360lm	IP65	


24V LED OUTDOOR SERIES

LLO24V-13




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø42x60	/	Aluminium	Iron Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	36°	OSRAM	280lm	IP65	

LLO24V-14



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	Ø60x100	/	Aluminium	Iron Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	36°	Bridgelux	760lm	IP65	


LLO24V-15



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø60x100	/	ALUMINIUM	Iron Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	36°	Bridgelux	1100lm	IP65	


24V LED OUTDOOR SERIES

LLO24V-16




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø35x60	/	Aluminium	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	220lm	IP65	

LLO24V-17



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	Ø35x85	/	Aluminium	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	15°	CREE	560lm	IP65	


LLO24V-18

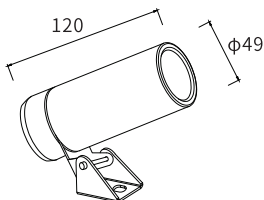

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
10W	Ø49x120	/	ALUMINIUM	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	15°	CREE	900lm	IP65	


24V OUTDOOR SERIES-UNDER GROUND LIGHTS

LLO24V-19




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	Ø42x80	Ø40	Aluminium	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	36°	OSRAM	220lm	IP65	

LLO24V-20



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2W	Ø42x80	Ø40	Stainless Steel	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	OSRAM	220lm	IP65	


LLO24V-21



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
3W	Ø62x85	Ø58	Stainless Steel	Iron Grey	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	280lm	IP65	


24V OUTDOOR SERIES-UNDER GROUND LIGHTS

LLO24V-22




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
6W	Ø110x100	Ø100	Stainless Steel	Stainless Steel	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	380lm	IP65	

LLO24V-23



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø160x110	Ø150	Stainless Steel	Stainless Steel	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	720lm	IP65	


LLO24V-24



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
18W	Ø160x110	Ø150	Stainless Steel	Stainless Steel	2700K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	15°	CREE	1100lm	IP65	


IP44/54 SMD DOWN LIGHTER'S

LLF-312




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	Ø80x72	Ø72~75	Aluminium+SPU	Black/White	3000K/4000K/5000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	100°	Bridgelux	504lm	IP54	

LLF-313



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø105x82	Ø97~100	Aluminium+SPU	Black/White	3000K/4000K/5000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	100°	Bridgelux	825lm	IP54	

LLF-314


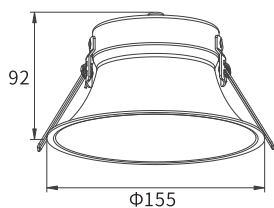


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
20W	Ø155x92	Ø147~150	Aluminium+SPU	Black/White	3000K/4000K/5000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	100°	Bridgelux	2020lm	IP54	

IP44/54 COB DOWN LIGHTER'S





LLF-317

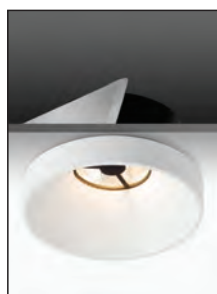

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
5W	Ø68x56	/	Aluminium	Black/White	2700K/3000K/4000K/5000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	20°/30°	/	236lm	IP54	

LLF-318

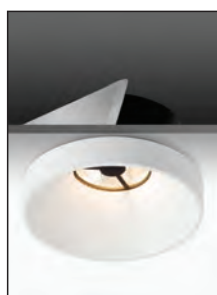


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
9W	Ø65x65	/	Aluminium	Black/White	272700K/3000K/4000K/5000K00K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	20°/30°	/	557lm	IP65	

IP44/54 COB CONCEALED DOWN LIGHTER'S




IP44/54 COB CONCEALED DOWN LIGHTER'S

LLF-292




Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø88x72	Ø80	Aluminium+SPU	Black	3000K/4000K/6000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	38°	Bridgelux C6	100lm	IP44	

LLF-275B

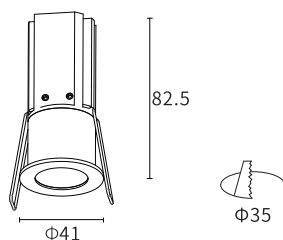

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7W	Ø41x82.56	Ø35	Aluminium+SPU	Black	4000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	20°	Bridgelux C6	398.72lm	IP44	

LLF-276B

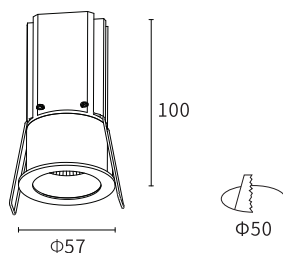

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
12W	Ø57x100	Ø50	Aluminium+SPU	Black	4000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>90	20°	Bridgelux C8	934.8lm	IP44	

LED OUTDOOR HAND RAIL LIGHTS


LED OUTDOOR HAND RAIL LIGHTS SERIES

Safe and durable
Fashionable and aesthetically pleasing



LED OUTDOOR HAND RAIL LIGHTS

LHR-001




Suit for handrail \varnothing 38~42mm, wall thickness 1.5~2mm; handrail \varnothing 42~100mm, wall thickness 1.5~6mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1.2W	M18x26	\varnothing 17, M18x1.0	316 Stainless Steel	Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	30°	CREE	122.48lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LHR-002

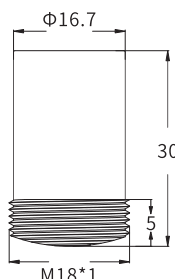


Suit for handrail \varnothing 42~48mm, wall thickness 1.5~2mm; handrail \varnothing 48~100mm, wall thickness 1.5~6mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1.2W	M18x30	\varnothing 17, M18x1.0	316 Stainless Steel	Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	Asymmetric55°	CREE	96lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LHR-003

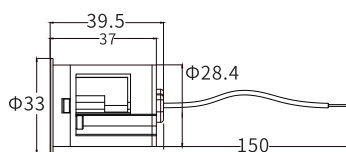


Suit for standard \geq 50 x 50mm square or rectangel handrail, wall thickness 0.8~3mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1.5W	\varnothing 33x39.5	\varnothing 30	Aluminium	Matt Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	Asymmetric65°	CREE	100.27lm	IP67	

LED OUTDOOR HAND RAIL LIGHTS

LHR-004




Suit for handrail Ø48-52mm,
wall thickness 0.8-3.0mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
1.5W	185x17.5x21	172x14.6~15	Aluminium	Matt Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	110.20lm	IP65	

Suit for class 2 power unit, maximum connected power not more than 100W

LHR-005




Suit for handrail Ø48-52mm,
wall thickness 0.8-3.0mm

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
2.5W	285x17.5x21	272x14.6~15	Aluminium	Matt Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	183.68lm	IP65	

Suit for class 2 power unit, maximum connected power not more than 100W

LHR-006



Suit for handrail Ø48-52mm,
wall thickness 0.8-3.0mm



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
4W	124x30x32	102x28	Aluminium	Matt Silver	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	10x100°	CREE	159.07lm	IP65	

Suit for class 2 power unit, maximum connected power not more than 100W



LED OUTDOOR SURFACE / CONCEALED / ELEVATION - UNDERGROUND-DRIVEOVER LIGHTS



LLU-001
SURFACE

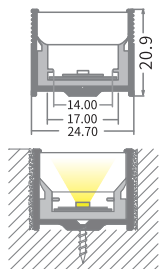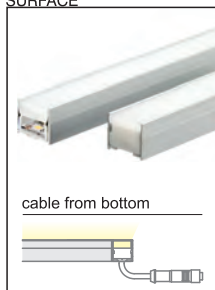

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
4.5W	300X24.7X20.9	28x20.9	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	303.6lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W



LLU-002
SURFACE

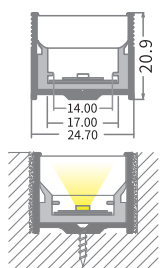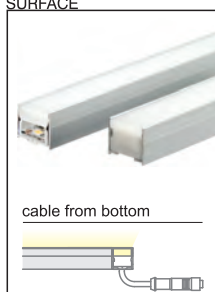

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7.5W	500x24.74x20.9	28x20.9	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	506.25lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LLU-003
SURFACE

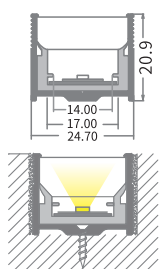
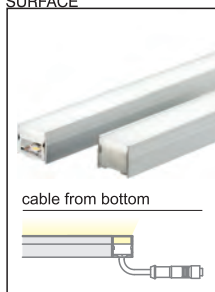


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	1000x24.7x20.9	28x20.9	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	1012lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LED OUTDOOR SURFACE / CONCEALED / ELEVATION - UNDERGROUND-DRIVEOVER LIGHTS



LLU-004
CONCEALED

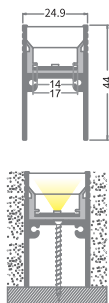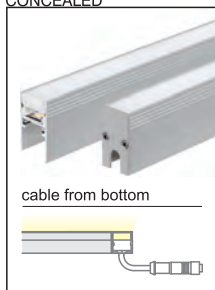

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
4.5W	300x24.9x44	28x44	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	318.9lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W



LLU-005
CONCEALED

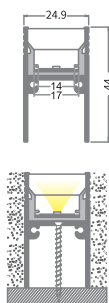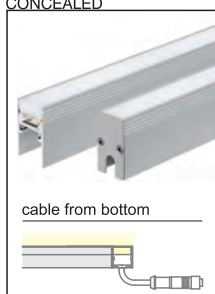

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
7.5W	500x24.9x44	28x44	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	531.5lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W

LLU-006
CONCEALED

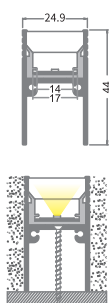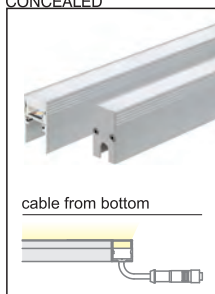


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
15W	1000x24.9x44	28x44	Aluminium Profile+PMMA	White	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	110°	Hongli	1063lm	IP67	

Suit for class 2 power unit, maximum connected power not more than 100W


LED Outdoor Lights-economy Series

LEO-001




Watt	Dimension(mm)	LED	Material	Body color	CCT
6W	63x83	CREE	Aluminium	Dark Grey	3000/2200K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	80lm/w	IP65		

LEO-002




Watt	Dimension(mm)	LED	Material	Body color	CCT
12W	83x97	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	80lm/w	IP65		

LEO-020




Watt	Dimension(mm)	LED	Material	Body color	CCT
3W	85x90	Bridgelux	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	80lm/w	IP54		

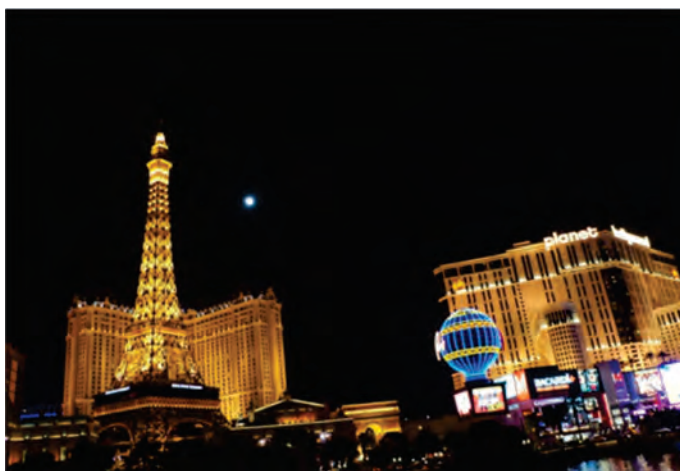


LED Outdoor Lights-economy Series

LEO-018




Watt	Dimension(mm)	LED	Material	Body color	CCT
3W	43x65	Bridgelux	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	24°	80lm/w	IP54		

LEO-019



Watt	Dimension(mm)	LED	Material	Body color	CCT
3W	43x65	Bridgelux	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	80lm/w	IP54		

LEO-021




Watt	Dimension(mm)	LED	Material	Body color	CCT
5W	130x65	Bridgelux	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	60°	80lm/w	IP54		




LED Outdoor Lights-economy Series

LEO-003



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
6W	100x80	90	CREE	Aluminium	2700K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	60°	130lm/w	IP65	Stainless Steel	

LEO-004



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
12W	150x95	105x110	CREE	Aluminium	2700K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥80	36°	130lm/w	IP65	Stainless Steel	

LEO-110

Under Ground Wall Washer




Watt	Dimension(mm)	Cut-Out(mm)	LED Chip	Material	CCT
10W	88x83	/	Bridgelux	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
>80	45°	950-1000lm	IP54	San Black / Bright Silver	



LED Outdoor Lights-economy Series




LEO-012




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
3W	42x82	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥ 80	60°	300-310lm	IP54	Dark Grey	

LEO-012A



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
2W	42x82	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥ 80	60°	80lm/w	IP54	Dark Grey	

LEO-013



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	CCT
3W	42x82	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥ 80	60°	300-310lm	IP54	Dark Grey	


36V
270mA

85-265V
50-60Hz

EPISTAR


LED Outdoor Lights-economy Series

LEO-014




Watt	Dimension (mm)	Cut-Out (mm)	LED chip	Material	CCT
3W	62x85	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥ 80	60°	300-310lm	IP54	Dark Grey	

LEO-015




Watt	Dimension (mm)	Cut-Out (mm)	LED chip	Material	CCT
3W	62x85	42	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥ 80	60°	300-310lm	IP54	Dark Grey	

LEO-016



Watt	Dimension (mm)	Cut-Out (mm)	LED	Material	CCT
3W	42x80	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥ 80	60°	300-310lm	IP54	Dark Grey	


LEO-017



Watt	Dimension (mm)	Cut-Out (mm)	LED	Material	CCT
3W	42x42x80	40	EPISTAR	Aluminium	3000K
CRI	Beam Angle	Luminous Flux	IP	Body color	
≥ 80	60°	300-310lm	IP54	Dark Grey	


LED Outdoor Lights-economy Series

LEO-005




Watt	Dimension(mm)	LED	Material	Body color	CCT
6W	173x54x60	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15°/36°	80lm/w	IP44		

LEO-006



Watt	Dimension(mm)	LED	Material	Body color	CCT
4x3W	100x100x51	CREE	Aluminium	Dark Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	36°	80lm/w	IP44		

LEO-007



Watt	Dimension(mm)	LED	Material	Body color	CCT
4x3W	100x100x51	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	15°	80lm/w	IP44		

LEO-006A




NARROW / WIDE BEAM



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
8W	Ø120x56	/	Aluminium	Sand Grey	3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	40° & 5°	High Power	80lm/w	IP54	


LED Outdoor Lights-economy Series

LEO-008

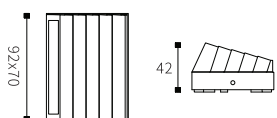



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	92x70	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	120°	80lm/w	IP44		

LEO-009




Watt	Dimension(mm)	LED	Material	Body color	CCT
4W	150x70	CREE	Aluminium	Dark Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	120°	80lm/w	IP44		

LEO-010

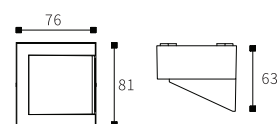

Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	76x81x63	CREE	Aluminium	Dark Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	36°	80lm/w	IP44		


LEO-011

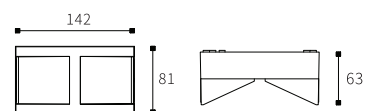

Watt	Dimension(mm)	LED	Material	Body color	CCT
2x3W	142x81x63	CREE	Aluminium	Dark Grey	2200/3000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	36°	80lm/w	IP44		


LED Outdoor Lights-economy Series

LEO-032




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	40x40x120	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5°	360-400lm	IP54		

LEO-033




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	40x60x90	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	5°	360-400lm	IP54		

LEO-032A




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	40x60x120	Bridgelux	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	10/60°	500-550lm	IP54		

LEO-032B



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	40x60x120	Bridgelux	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	500-550lm	IP54		


LEO-033A



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	40x60x90	Bridgelux	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	60°	250-270lm	IP54		



LED Outdoor Lights-economy Series

LEO-035



Watt	Dimension (mm)	LED chip	Material	Body color	CCT
3W	66x70x42	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	300-310lm	IP54		

LEO-036




Watt	Dimension (mm)	LED chip	Material	Body color	CCT
6W	88x70x42	CREE	Aluminium	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	540-600lm	IP54		




LED Outdoor Lights-economy Series

LEO-049




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	80x60x35	EPISTAR-COB	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	85°	240lm	IP54		

LEO-050




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	80x60x35	EPISTAR-COB	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	85°	480lm	IP54		

LEO-051



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2x3W	90x50	EPISTAR-COB	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	85°	480lm	IP54		


LEO-052



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
4x3W	90x50	EPISTAR-COB	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	85°	960lm	IP54		

LEO-109

STREAKS ON WALL



Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
10W	168x150x124	/	Aluminium	sand Grey	3000K
CRI	Beam Angle	Luminous Flux	LED chip	IP	
>80	90x90°	800lm	Bridgelux	IP67	


85-265V
50-60Hz

EPISTAR

LED Outdoor Lights-economy Series




LEO-045



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	47x70x170	EPISTAR	Aluminium+pc	Black/White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	788lm	IP54		


LEO-046



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
15W	47x70x210	EPISTAR	Aluminium+pc	Black/White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	90°	1442lm	IP54		


LED Outdoor Lights-economy Series

LEO-037




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	90x46	EPISTAR SMD 2835	Aluminium+pc	Black	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
>80	180°	95-100lm/w	IP54		

LEO-038




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
16W	140x46	EPISTAR SMD 2835	Aluminium+pc	Black	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	180°	95-100lm/w	IP54		

LEO-039



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
8W	90x90x46	EPISTAR SMD 2835	Aluminium+pc	Black	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	180°	95-100lm/w	IP54		

LEO-040



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
16W	140x140x46	EPISTAR SMD 2835	Aluminium+pc	Black	3000K/4000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	180°	95-100lm/w	IP54		

LED Outdoor Surface Fixtures-economy Series




EPISTAR

85-265V
50-60Hz


LED Outdoor Surface Fixtures-economy Series

LEO-053




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
14W	90x136	CREE	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	36°	1120lm	IP54		

LEO-054




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
14W	90x90x136	CREE	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	36°	1120lm	IP54		

LEO-055




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
21W	145x140	CREE	Die-casting	Dark Grey	3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	36°	1680lm	IP54		

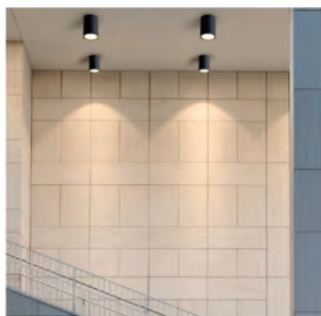


LED Outdoor Lights-economy Series

LEO-024




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	80x80x40	72x72	Bridgelux	Aluminium	Dark Grey/White
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	60°	240-260lm	IP54	3000K	

LEO-025




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	80x80x40	72x72	Bridgelux	Aluminium	Dark Grey/White
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	60°	240-260lm	IP54	3000K	

LEO-034




Watt	Dimension(mm)	Cut-Out(mm)	LED	Material	Body color
3W	60x60x35	45x45	Bridgelux	Aluminium	Dark Grey/White
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	90°	270-280lm	IP54	3000K	

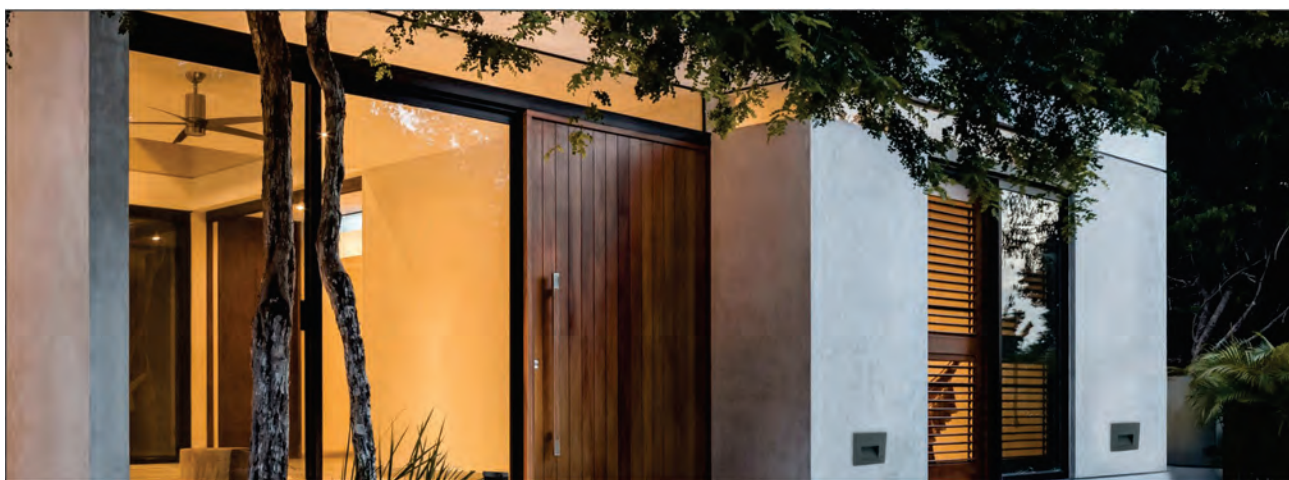


LED Outdoor Lights-economy Series

LEO-041




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
2W	114x114x65	114x105x60	CREE XBD	Aluminium	Dark Grey
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	30°	80lm/w	IP65	3000K	

LEO-042




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
4W	170x114x65	170x105x60	CREE XBD	Aluminium	Dark Grey
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	30°	80lm/w	IP65	3000K	

LEO-043




Watt	Dimension(mm)	Cut-Out(mm)	LED	Material	Body color
6W	226x114x65	226x105x60	CREE XBD	Aluminium	Dark Grey
CRI	Beam Angle	Luminous Flux	IP	CCT	
≥80	30°	80lm/w	IP65	3000K	

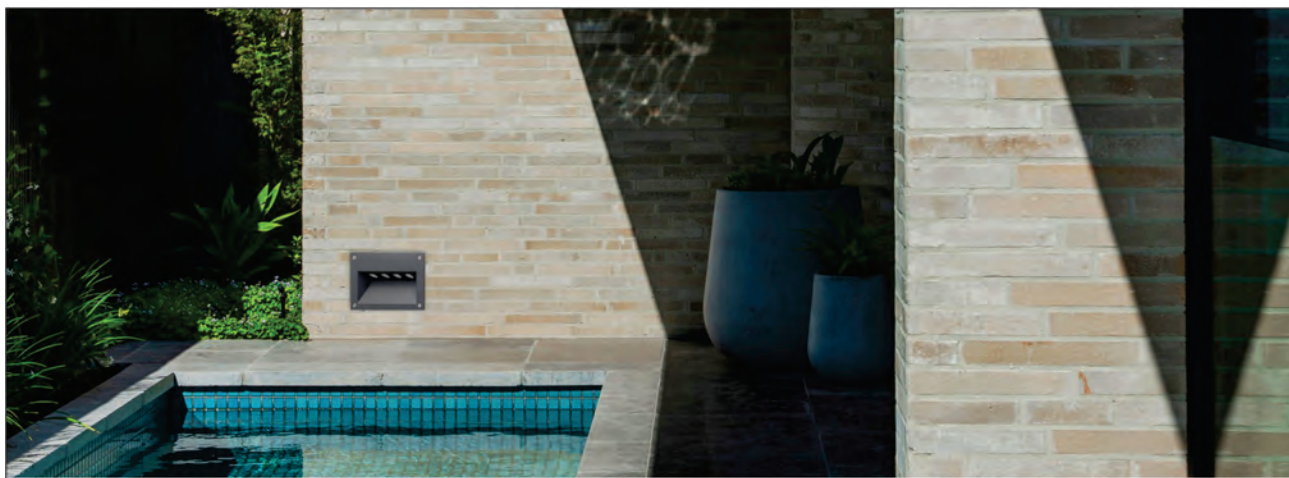

LED Outdoor Lights-economy Series




LEO-100




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
2W	65x80	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	130lm/w	IP68	24V	

LEO-101



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
3W	82x140	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	130lm/w	IP68	24V	

LEO-102




Watt	Dimension(mm)	LED	Material	Body color	CCT
6W	120x140	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	130lm/w	IP68	24V	

- 1: Not to be switched on(Even for testing purpose)if the fixture is not under water
- 2: not to cut the IP68 cable provided by the manufacturer

LED Outdoor Lights-economy Series




LEO-102A




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
6W	120x140	EPILEDS	304 stainless steel	Stainless Steel	RGB DMX512
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	112lm/w	IP68	24V	

LEO-103



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	145x180	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	80lm/w	IP68	24V	


LEO-103A



Watt	Dimension(mm)	LED	Material	Body color	CCT
12W	145x180	EPILEDS	304 stainless steel	Stainless Steel	RGB DMX512
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	112lm/w	IP68	24V	


LED Outdoor Lights-economy Series

LEO-104



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
12W	160x85	Bridgelux	304 stainless steel	Stainless Steel	2700K
CRI	Beam Angle	Luminous Flux	IP	Voltage	
≥80	15°	130lm/w	IP68	24V	

LEO-105



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
3W	100x90	88	Bridgelux	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	Voltage	CCT
≥80	15°	130lm/w	IP68	24V	2700K

LED Outdoor Lights-economy Series


Control different scenes, flexibly compatible
with various spaces
A variety of specifications to meet individual needs



- 1: Not to be switched on(Even for testing purpose)if the fixture is not under water
- 2: not to cut the IP68 cable provided by the manufacturer


LED Outdoor Lights-economy Series

LEO-106A




Watt	Dimension(mm)	Cut-Out(mm)	LED	Material	Body color
6W	120x90	110-100	EPISTAR	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	CCT	Voltage
≥80	15°	112lm/w	IP68	RGB DM512	24V

LEO-106




Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
7W	120x90	108	EPISTAR	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	CCT	Voltage
≥80	15°	130lm/w	IP68	RGB	24V

LEO-107A



Watt	Dimension(mm)	Cut-Out(mm)	LED chip	Material	Body color
12W	150x95	136	EPISTAR	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	CCT	Voltage
≥80	15°	112lm/w	IP68	RGB DMX512	24V

LEO-107



Watt	Dimension(mm)	Cut-Out(mm)	LED	Material	Body color
12W	150x95	136	Bridgelux	304 stainless steel	Stainless Steel
CRI	Beam Angle	Luminous Flux	IP	CCT	Voltage
≥80	15°	130lm/w	IP68	3000K	24V

1: Not to be switched on(Even for testing purpose)if the fixture is not under water
2: not to cut the IP68 cable provided by the manufacturer



IP54



IP65



IP68

24V
50Hz


bridgelux

EPISTAR

LED Outdoor Flood Lights




LFL-001




Watt	Dimension(mm)	LED	Material	Body color
10W	110x130x38	Sanan 2835	Die-cast Aluminium+ glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K/RED/ BLUE/GREEN	≥80	110°	100lm/w	IP65

LFL-001A




Watt	Dimension(mm)	LED	Material	Body color
10W	110x130x38	Sanan 2835	Die-cast Aluminium+ glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
RGB	≥80	110°	100lm/w	IP65

LFL-002A



Watt	Dimension(mm)	LED	Material	Body color
20W	183x155x55	Sanan 2835	Die-cast Aluminium+ glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
RGB	≥80	110°	100lm/w	IP65

LFL-002




Watt	Dimension(mm)	LED	Material	Body color
20W	183x155x55	Sanan 2835	Die-cast Aluminium+ glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K/RED/ BLUE/GREEN	≥80	110°	100lm/w	IP65



100-240V
50-60Hz


LED Outdoor Flood Lights

LFL-003




Watt	Dimension(mm)	LED	Material	Body color
30W	200x171x52	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K	≥ 80	110°	100lm/w	IP65

LFL-004




Watt	Dimension(mm)	LED	Material	Body color
50W	248x200x61	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K/RED /BLUE/GREEN	≥ 80	110°	100lm/w	IP65

LFL-004A




Watt	Dimension(mm)	LED	Material	Body color
50W	248x200x61	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
RGB	≥ 80	110°	100lm/w	IP65

LFL-005



Watt	Dimension(mm)	LED	Material	Body color
100W	283x256x70	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K	≥ 80	110°	100lm/w	IP65

LFL-006




Watt	Dimension(mm)	LED	Material	Body color
200W	350x310x92	Sanan 2835	Die-cast Aluminium+glass	Black
CCT	CRI	Beam Angle	Luminous Flux	IP
3000/6000K	≥ 80	110°	100lm/w	IP65

LED Outdoor Flood Lights



LFL-030




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
20W	120x100x25	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

185-300V


LED Outdoor Flood Lights

LFL-031




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
30W	140x120x30	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

LFL-032




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
50W	180x160x30	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

LFL-033




Watt	Dimension(mm)	LED chip	Material	Body color	CCT
100W	300x265x35	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

LFL-034



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
150W	300x265x35	LED 2835/DOB	Aluminum	Grey	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP66		

LFL-035




Watt	Dimension(mm)	LED Chip	Material	Body color	CCT
200W	360x320x40	SANAN	Aluminium	Black	6500/3000K
CRI	Beam Angle	Luminous Flux	IP		
>80	120°	80-90lm/w	IP65		

LED Outdoor Flood Lights




LFL-036

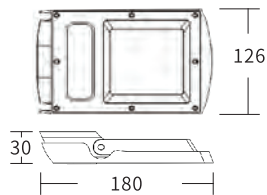

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
30W	126x180x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-100lm/w	IP66	

LFL-037

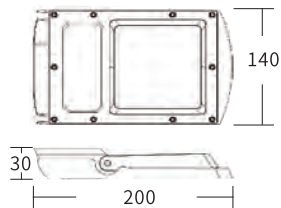


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
50W	140x200x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-110lm/w	IP66	



100-240V
50-60Hz


LED Outdoor Flood Lights

LFL-038

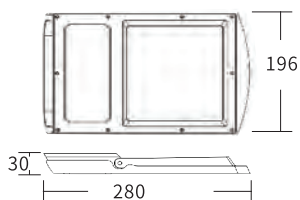


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
100W	196x280x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-110lm/w	IP66	

LFL-039

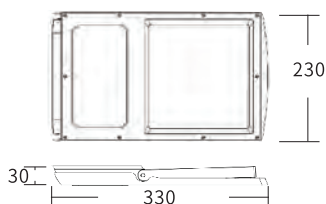

Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
150W	230x330x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-110lm/w	IP66	

LFL-040

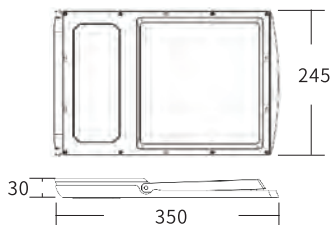


Watt	Dimension(mm)	Cut-Out(mm)	Material	Body color	CCT
200W	245x350x30	/	Aluminium+PC	Grey	6500/3000K
CRI	Beam Angle	LED Chip	Luminous Flux	IP	
>80	90°	SANAN 2835	100-110lm/w	IP66	

LED Outdoor Flood Lights




LFL-011



Watt	Dimension(mm)	LED	Material	Body color	CCT
10W	125x117x37	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	110°	100lm/w	IP65		

LFL-012




Watt	Dimension(mm)	LED	Material	Body color	CCT
20W	150x140x40	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥ 80	110°	100lm/w	IP65		



100-240V
50-60Hz


LED Outdoor Flood Lights

LFL-013




Watt	Dimension(mm)	LED	Material	Body color	CCT
30W	180x170x40	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-014




Watt	Dimension(mm)	LED	Material	Body color	CCT
50W	244.5x234.5x52.5	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-015



Watt	Dimension(mm)	LED	Material	Body color	CCT
100W	280x270x54.5	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-016



Watt	Dimension(mm)	LED	Material	Body color	CCT
200W	345x335x84	SANAN 5730	Die-cast Aluminium+glass	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LED Outdoor Flood Lights




LFL-017-020



100-240V
50-60Hz


LED Outdoor Flood Lights

LFL-017




Watt	Dimension(mm)	LED	Material	Body color	CCT
30W	210x150x30	Sanan 2835	Die-cast Aluminium+glass	White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-018




Watt	Dimension(mm)	LED	Material	Body color	CCT
50W	245x190x35	Sanan 2835	Die-cast Aluminium+glass	White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-019



Watt	Dimension(mm)	LED	Material	Body color	CCT
100W	320x250x45	Sanan 2835	Die-cast Aluminium+glass	White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		

LFL-020



Watt	Dimension(mm)	LED	Material	Body color	CCT
150W	380x300x60	Sanan 2835	Die-cast Aluminium+glass	White	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP65		


LED Street Lights



100-240V
50-60Hz

LED Street Lights

LST-001




Watt	Dimension(mm)	LED	Material	Body color	CCT
18W	260x120x62	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		

LST-002



Watt	Dimension(mm)	LED	Material	Body color	CCT
24W	290x122x65	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		

LST-003




Watt	Dimension(mm)	LED	Material	Body color	CCT
36W	320x130x65	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		

LST-004



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
50W	365x125x55	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		

LST-005



Watt	Dimension(mm)	LED chip	Material	Body color	CCT
100W	440x183x85	Sanan 3030	Die-cast Aluminium+pc	Black	3000/6000K
CRI	Beam Angle	Luminous Flux	IP		
≥80	110°	100lm/w	IP67		



IMPORTED AND MARKETED BY/CUSTOMER CARE ADDRESS
LED Lum Lighting Solutions LLP

#22A, 7th Street, Sector 3, Ambattur Industrial Estate,
Ambattur, Chennai-600098

Landline : +91 44 4852 8068, 4852 8069,

Mobile : +91 97907 99997, Customer Care : +91 96631 02951,

Email : ledlumlighting@gmail.com, Web : www.ledlumlighting.com